
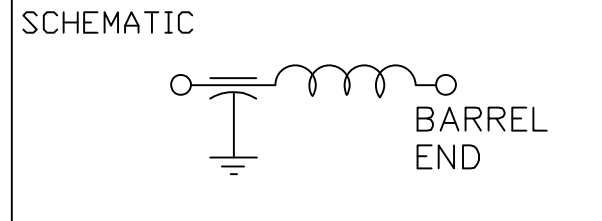


LEAD FINISH: GOLD PL.	
CASING FINISH: GOLD PL.	
CAPACITANCE	100pF MIN.
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	125°C -- VAC MAX. 125°C 200 VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
1	--
10	--
100	5
1 GHz	22
10 GHz	35



NOTES:
 1. SUGGESTED MOUNTING HOLE = $\phi.130$

MARKING:
 PART: COLOR DOT: GREEN
 BAG:
 SCI-9980-101
 DATE CODE
 LOT NO.
 QTY/BAG (200 MAX.)

	00	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED	 FAIRVIEW PENNSYLVANIA SPECTRUM CONTROL INC.	
	CN 53065-ENG	CHANGE NOTICE	Fractions $\pm 1/64$		Dwn. KAUFFMAN
			Dec. $.xx \pm$		Date 2-22-10
			Dec. $.xxx \pm .005$		Engr. B. DEVINE
			Angles $\pm 0^\circ 30'$		Scale NONE
		CODE IDENT. NO. DLSP2	Description FEEDTHRU FILTER SCI-9980-101		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[API Technologies:](#)

[SCI-9980-101](#)