


Product availability: Stock - Normally stocked in distribution facility

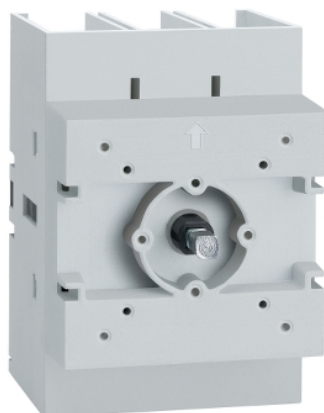

Main

Range	TeSys
Product name	TeSys VARIO LS
Device short name	VLS3P
Product or component type	Switch body
Performance level	High performance
Poles description	3P
Contacts type and composition	3 NO
Network type	AC
Network frequency	50/60 Hz

Complementary

Mounting support	Door
[Ue] rated operational voltage	690 V AC 50/60 Hz
[Uimp] rated impulse withstand voltage	8 kV
[Ith] conventional free air thermal current	125 A 131 °F (55 °C)
[Ithe] conventional enclosed thermal current	100 A
[Ie] rated operational current	47 A AC-23A Ue: 690 V 100 A Ue: 600 V UL98 125 A AC-21A Ue: 400 V 125 A AC-21A Ue: 500 V 125 A AC-21A Ue: 690 V 125 A AC-22A Ue: 400 V 125 A AC-22A Ue: 500 V 125 A AC-22A Ue: 690 V 125 A AC-23A Ue: 400 V 100 A AC-23A Ue: 500 V
Rated operational power in W	45 KW 500 V AC-23A) 45 KW 690 V AC-23A) 55 kW 400 V AC-23A)
Intermittent duty class	Class 120 - 60 %
Making capacity (I Rms)	1250 A 690 V AC-23A 187.5 A 690 V AC-21A 375 A 690 V AC-22A
[Icm] rated short-circuit making capacity	3550 A 690 V
[Icw] rated short-time withstand Rms current	2500 A 690 V 1 s
Rated conditional short-circuit current	50 kA 400 V 125 A gG
Breaking capacity	187.5 A 690 V AC-21A) 375 A 690 V AC-22A) 1000 A 690 V AC-23A)
Mechanical durability	30000 cycles
Electrical durability	30000 cycles AC-21
Connections - terminals	Power circuit screw clamp terminals 0.08 in ² (50 mm ²) solid Power circuit screw clamp terminals 0.11 in ² (70 mm ²) flexible - without cable end
Tightening torque	Power circuit 44.25...53.10 lbf.in (5...6 N.m) screw clamp terminals
Height	2.76 in (70 mm)
Width	2.76 in (70 mm)
Depth	3.94 in (100 mm)
Net weight	0.80 lb(US) (0.365 kg)
Color	Grey

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Environment

Standards	CSA C22.2 No 4 UL98 IEC 60947-3
Product certifications	GL
IP degree of protection	IP20 IEC 60529
Mechanical robustness	Vibrations 2...100 Hz Fc 0.7 g) IEC 60068-2-6 Shocks 11 ms Ea 15 gn) IEC 60068-2-27
Ambient air temperature for operation	-13...131 °F (-25...55 °C)
Fire resistance	1760 °F (960 °C) IEC 60695-2-11

Ordering and shipping details

Category	21734 - TESYS VLS DISCONNECT SWITCHES
Discount Schedule	CP1
GTIN	00785901566274
Package weight(Lbs)	0.44 kg (0.97 lb(US))
Returnability	Yes
Country of origin	IT

Offer Sustainability

REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration