




A-4-05-07

CA

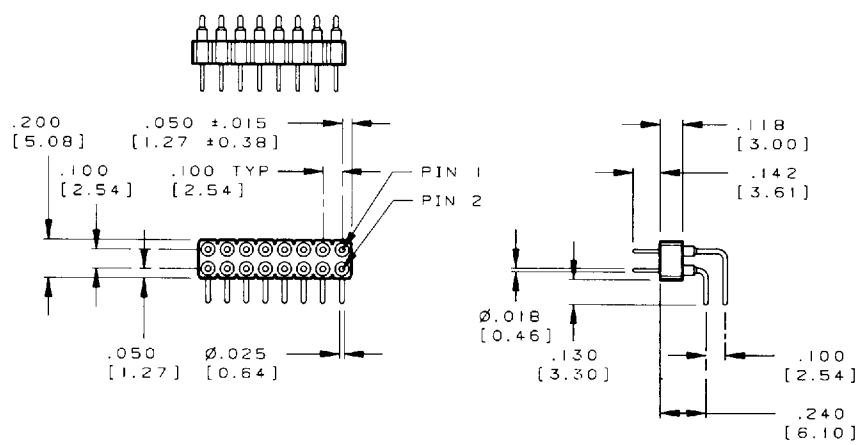

.100 SYSTEM STRIP PLUG RIGHT ANGLE EXIT

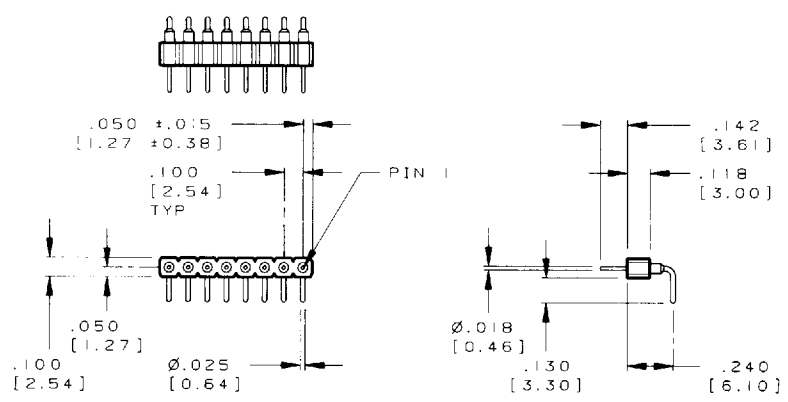

Features

Available in single and dual row right angle configurations

Specifications

Environmental

Temperature Range: -55°C to +125°C

Mechanical

Insulator Material: Glass filled polyester, black, UL94V-0

Contact Material: Brass

Contact Plating: 10µ IN gold

Electrical

Current Rating: 3 AMP

Dielectric Withstanding Voltage: 300 Vrms

Insulation Resistance: > 1000 Megohms

Mating CA Product:

Single Row: S-MS, S-MSR
Dual Row: D-MS, D-MSR

Part Numbers

CA - D 72 MPR - F 1 B

<p>1 NO. OF ROWS</p> <p>S = Single Row D = Dual Row</p>	<p>2 NO. OF POSITIONS</p> <p>Single Row = 01 thru 36 Dual Row = 02 thru 72</p>	<p>3 SERIES</p> <p>MPR = Screw Machine Plug, Right Angle</p>	<p>4 PLUG POST TYPE</p> <p>F = post</p>	<p>5 PLUG TAIL TYPE</p> <p>1 = solder tail</p>	<p>6 CONTACT PLATING</p> <p>B = 10µ IN gold</p>
--	---	---	--	---	--

