
# NPN EPITAXIAL SILICON TRANSISTOR

## SWITCHING AND AMPLIFIER APPLICATIONS

- Suitable for automatic insertion in thick and thin-film circuits
- LOW NOISE: BC849, BC850
- Complement to BC856 ... BC860

# ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub>=25°C)

Characteristic	Symbol	Rating	Unit
Collector Base Voltage : BC846 : BC847/850 : BC848/849 Collector Emitter Voltage : BC846 : BC847/850 : BC848/849	V <sub>CBO</sub>	80 50 30 65 45 30	>>> >>>
Emitter-Base Voltage : BC846/847 : BC848/849/850 Collector Current (DC) Collector Dissipation Junction Temperature Storage Temperature	V <sub>EBO</sub> lc Pc TJ T <sub>STG</sub>	6 5 100 310 150 -65 ~ 150	∨ ∨ m <b>A</b> m <b>W</b> °C °C

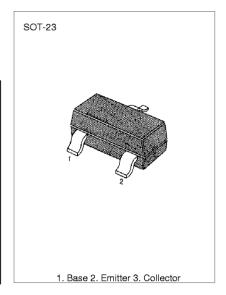

# **ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25°C)**

Characteristic	Symbol	Test Conditions	Min	Тур	Max	Unit
Collector Cut-off Current DC Current Gain Collector Emitter Saturation Voltage Collector Base Saturation Voltage Base Emitter On Voltage	lcBO hFE VcE (sat) VBE (sat) VBE (on)	V <sub>CB</sub> =30V, I <sub>E</sub> =0 V <sub>CE</sub> =5V, I <sub>C</sub> =2mA I <sub>C</sub> =10mA, I <sub>B</sub> =0.5mA I <sub>C</sub> =100mA, I <sub>B</sub> =5mA I <sub>C</sub> =100mA, I <sub>B</sub> =5mA V <sub>CE</sub> =5V, I <sub>C</sub> =2mA V <sub>CE</sub> =5V, I <sub>C</sub> =10mA	110 580	90 200 700 900 660	15 800 250 600 700 720	mV mV mV mV mV
Current Gain Bandwidth Product	f⊤	V <sub>CE</sub> =5V, I <sub>C</sub> =10mA f=100MHz		300		MHz
Collector Base Capacitance Emitter Base Capacitance Noise Figure : BC846/847/848 : BC849/850 : BC849 : BC850	C <sub>CBO</sub> C <sub>EBO</sub> NF	$\begin{array}{l} V_{\text{CB}}\!\!=\!\!10\text{V, f=}1\text{MHz} \\ V_{\text{EB}}\!\!=\!\!0.5\text{V, f=}1\text{MHz} \\ V_{\text{CE}}\!\!=\!\!5\text{V, I}_{\text{C}}\!\!=\!\!200\mu\text{A} \\ f\!\!=\!\!1\text{KHz, R}_{\text{G}}\!\!=\!\!2\text{K}\Omega \\ V_{\text{CE}}\!\!=\!\!5\text{V, I}_{\text{C}}\!\!=\!\!200\mu\text{A} \\ R_{\text{G}}\!\!=\!\!2\text{K}\Omega \\ f\!\!=\!\!30\!\!\sim\!\!15000\text{Hz} \end{array}$		3.5 9 2 1.2 1.4 1.4	6 10 4 4 3	pF pF dB dB dB dB


# h<sub>FE</sub> CLASSIFICATION

Classification	Α	В	С		
h <sub>FE</sub>	110-220	200-450	420-800		

## **MARKING CODE**

TYPE	846A	846B	846C	847 <b>A</b>	847B	847C	848 <b>A</b>	848 <b>B</b>	848C	849 <b>A</b>	849 <b>B</b>	849C	850A	850B	850C
MARK	8 <b>AA</b>	8 <b>A</b> B	8AC	8B <b>A</b>	8BB	8BC	8CA	8CB	8CC	8D <b>A</b>	8DB	8DC	8EA	8EB	8EC



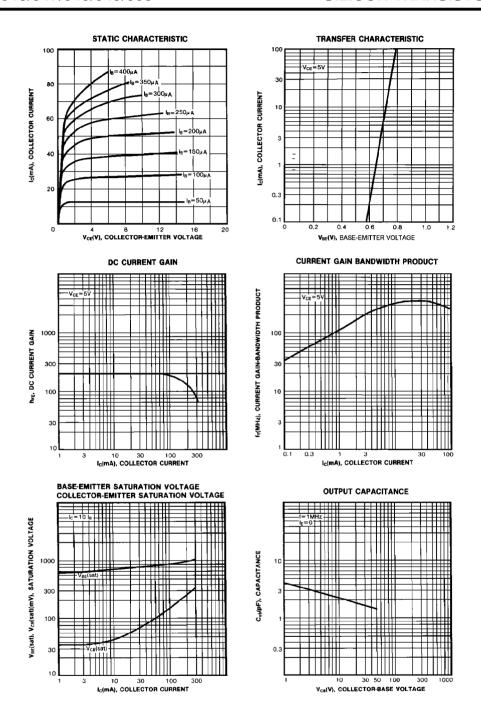



#### **TRADEMARKS**

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEX™ ISOPLANAR™ CoolFET™ MICROWIRE™

CROSSVOLT<sup>TM</sup> POP<sup>TM</sup>

E²CMOS™ PowerTrench™

FACT<sup>TM</sup> QS<sup>TM</sup>

FACT Quiet Series  $^{\text{TM}}$  Quiet Series  $^{\text{TM}}$  SuperSOT  $^{\text{TM}}$ -3 FAST  $^{\text{TM}}$  SuperSOT  $^{\text{TM}}$ -6 GTO  $^{\text{TM}}$  SuperSOT  $^{\text{TM}}$ -8 HiSeC  $^{\text{TM}}$ 

## **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS. NOR THE RIGHTS OF OTHERS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## **PRODUCT STATUS DEFINITIONS**

#### **Definition of Terms**

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.