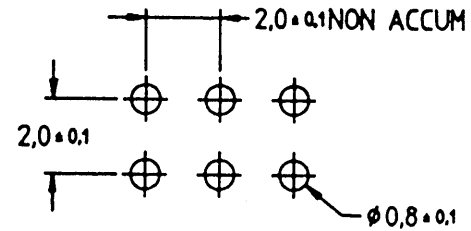
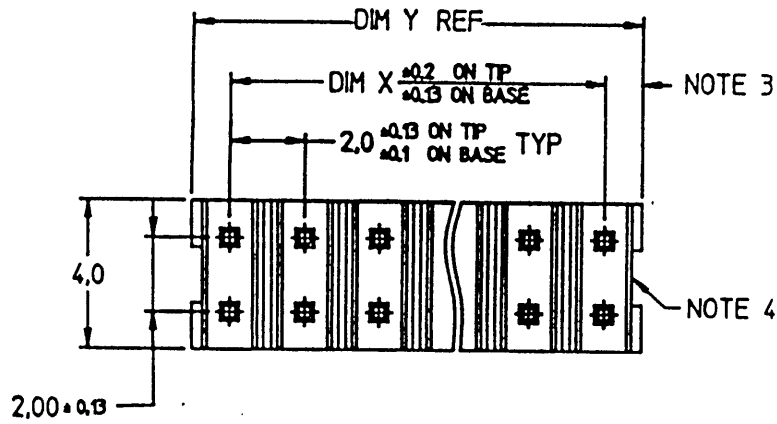
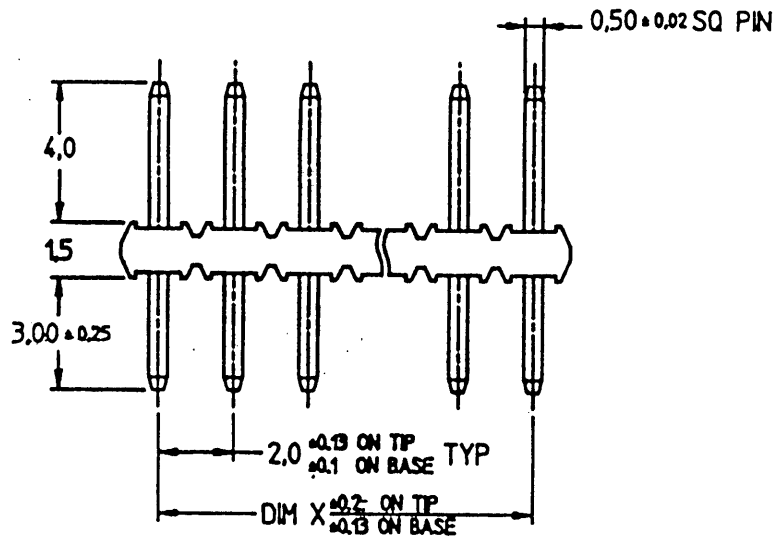


→ IF RED ←

RECEIVED - 5 OCT 1990



PC BOARD THK : 1.6 \pm 0.1
RECOMMENDED MOUNTING HOLE LAYOUT



CUSTOMER COPY

| | | | | |
|------------------|------------|------------------|------------------------|-----------|
| E | ECR S00231 | | MLC/M/A | 26.8.90 |
| D | ECR S00190 | | MLC/M/A | 16.8.90 |
| C | ECM S0399 | | SETAY | 16/1/90 |
| B | ECM S0308 | | BSLOW | 31 MAY 89 |
| A | ECM S0265 | | BSLOW | 20.3.89 |
| REV | | DESCRIPTION | REV'D BY | DATE |
| GEN. TOLERANCES | | DO NOT SCALE DWG | DuPont Electronics | |
| REFER TO | | MM | | |
| NOTE 2 | | | | |
| | NAME | DATE | DESCRIPTION MINITEK II | |
| | | | HEADER (2 ROWS STR) | |
| DRAWN | BS LOW | 15.2.89 | PROJECT NO | |
| CHECKED | | 21.2.89 | PRODUCT NO 86451 | |
| APPROVED | | 22.2.89 | SCALE | |
| STATUS: Released | | | SH 1 OF 2 | |

| PRODUCT NO | POS | DIM X | DIM Y |
|------------|------|---------------|-------|
| 86451-X02 | 2X1 | - OBSOLETED - | |
| X04 | 2X2 | 2 | 4 |
| X06 | 2X3 | 4 | 6 |
| X08 | 2X4 | 6 | 8 |
| X10 | 2X5 | 8 | 10 |
| X12 | 2X6 | 10 | 12 |
| X14 | 2X7 | 12 | 14 |
| X16 | 2X8 | 14 | 16 |
| X18 | 2X9 | 16 | 18 |
| X20 | 2X10 | 18 | 20 |
| X22 | 2X11 | 20 | 22 |
| X24 | 2X12 | 22 | 24 |
| X26 | 2X13 | 24 | 26 |
| X28 | 2X14 | 26 | 28 |
| X30 | 2X15 | 28 | 30 |
| X32 | 2X16 | 30 | 32 |
| X34 | 2X17 | 32 | 34 |
| X36 | 2X18 | 34 | 36 |
| X38 | 2X19 | 36 | 38 |
| X40 | 2X20 | 38 | 40 |
| X42 | 2X21 | 40 | 42 |
| X44 | 2X22 | 42 | 44 |
| X46 | 2X23 | 44 | 46 |
| X48 | 2X24 | 46 | 48 |
| X50 | 2X25 | 48 | 50 |

RECEIVED - 5 OCT 1990

| PLATING | DESCRIPTION |
|---------|-------------|
| 0 | 0.2 um Au |
| 1 | 0.76 um Au |
| 2 | UNASSIGNED |
| 3 | 0.38 um Au |
| 4 | UNASSIGNED |
| 5 | 0.38 um GXT |
| 6 | 0.76 um GXT |




PART NUMBER INFORMATION

XXXXX-XXX

BASE P/N TERMINAL PLATING

NOTES

- MATERIAL
 BODY : GLASS FILLED NYLON UL 94V-0 BLACK
 PIN : PHOSPHOR BRONZE
- TOLERANCE UNLESS OTHERWISE NOTED ±0.25
- DIM 1.0 ±0.15 FOR MOLDED SIDE(S) ONLY
 IF SIDE(S) ARE BROKEN DIM 1.5 MAX APPLIES
- RECESS APPLIES TO MOLDED SIDE(S) ONLY

| | | | |
|------------------------------------|--------------------|--|---------|
| E | | | |
| D | | | |
| C | | | |
| B | | | |
| A | | | |
| REV | DESCRIPTION | REV'D BY | DATE |
| GEN. TOLERANCES REFER TO NOTE 2 | | DO NOT SCALE DWG MM   | |
| | | DuPont Electronics  | |
| | | DESCRIPTION MINITEK II HEADER (2 ROWS STR) | |
| | | PROJECT NO | |
| DRAWN | BS LOW | DATE | 15.2.89 |
| CHECKED | <i>[Signature]</i> | DATE | 22.2.89 |
| APPROVED | <i>[Signature]</i> | DATE | 22.2.89 |
| | | PRODUCT NO | 86451 |
| | | SCALE | |
| | | BMT | 2 OF 2 |

CUSTOMER COPY