


REVISONS		DATE	DWN	APVD
AD	DIST			
0	DP 4633-96-33	6/20/96	TH	GD

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
  - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- △ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- △ HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
- △ FINISH: 0.000381 [0.00015] GOLD ON CONTACT AREA, 0.00254-0.00508 [0.00100-0.00200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127 [0.00050] NICKEL.

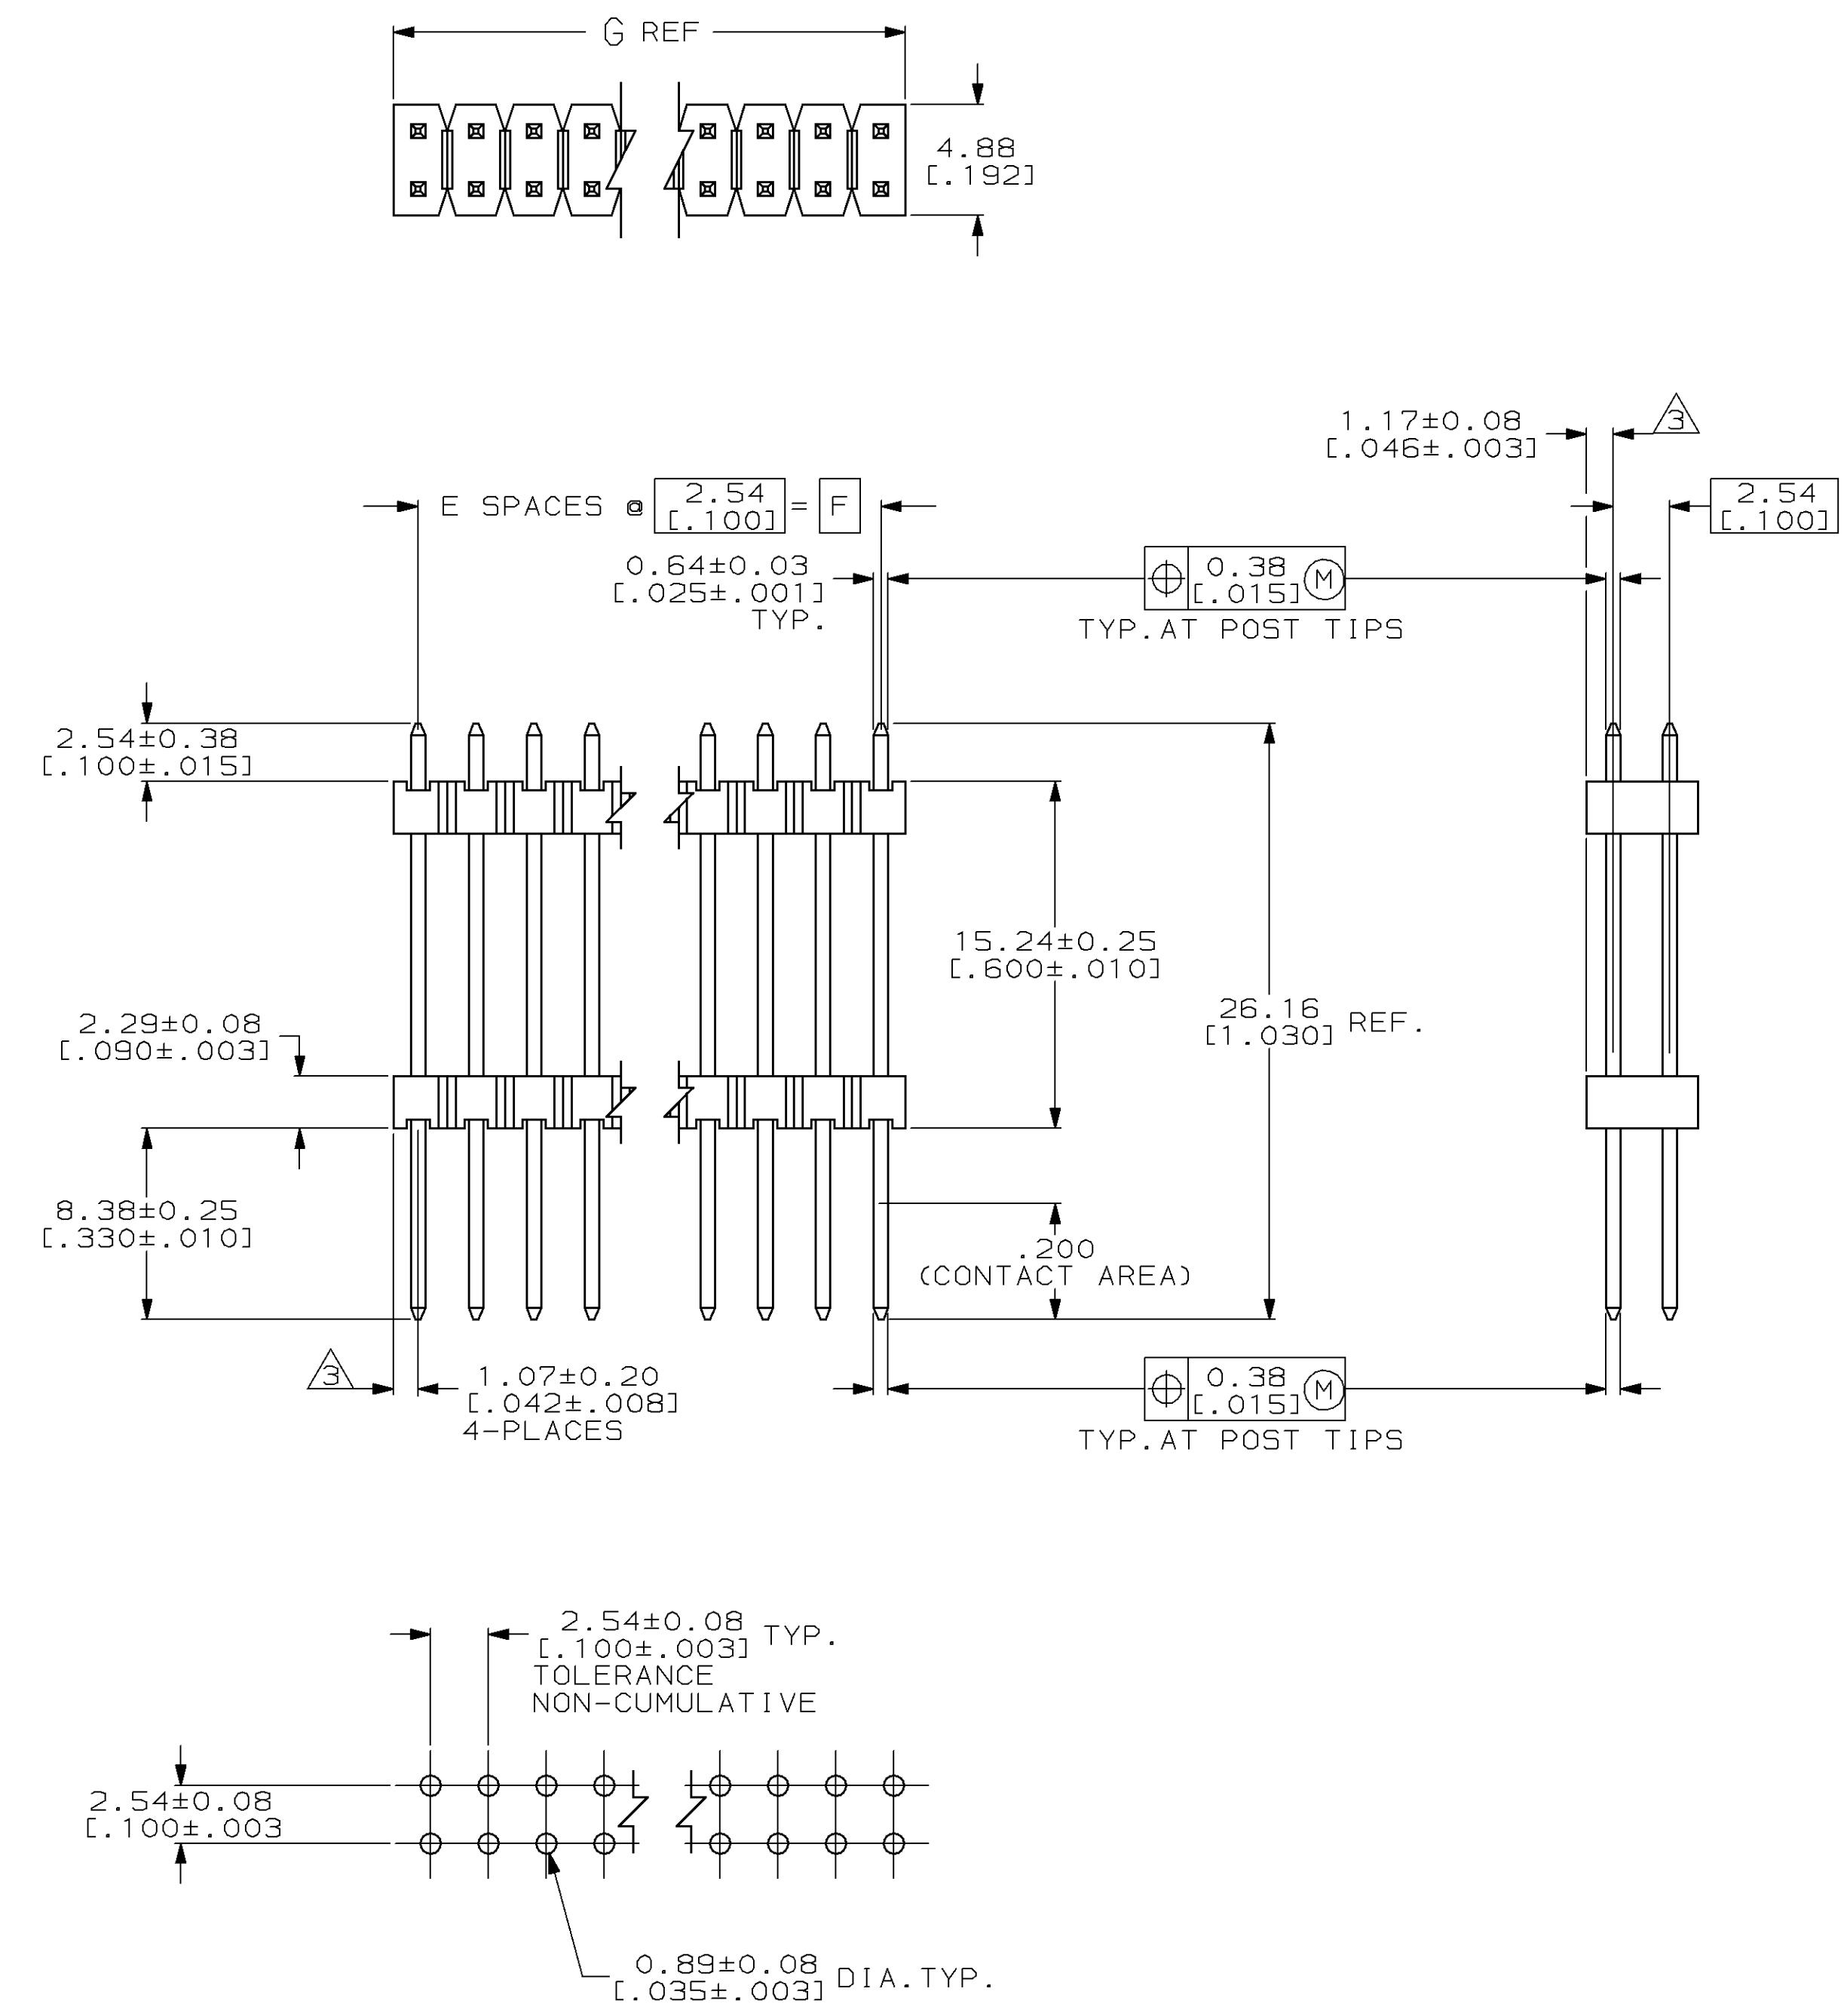

101.19	99.06	39	80	4-146497-0
[3.984]	[3.900]			
98.65	96.52	38	78	3-146497-9
[3.884]	[3.800]			
96.11	93.98	37	76	3-146497-8
[3.784]	[3.700]			
93.57	91.44	36	74	3-146497-7
[3.684]	[3.600]			
91.03	88.90	35	72	3-146497-6
[3.584]	[3.500]			
88.49	86.36	34	70	3-146497-5
[3.484]	[3.400]			
85.95	83.82	33	68	3-146497-4
[3.384]	[3.300]			
83.41	81.28	32	66	3-146497-3
[3.284]	[3.200]			
80.87	78.74	31	64	3-146497-2
[3.184]	[3.100]			
78.33	76.20	30	62	3-146497-1
[3.084]	[3.000]			
75.79	73.66	29	60	3-146497-0
[2.984]	[2.900]			
73.25	71.12	28	58	2-146497-9
[2.884]	[2.800]			
70.71	68.58	27	56	2-146497-8
[2.784]	[2.700]			
68.17	66.04	26	54	2-146497-7
[2.684]	[2.600]			
65.63	63.50	25	52	2-146497-6
[2.584]	[2.500]			
63.09	60.96	24	50	2-146497-5
[2.484]	[2.400]			
60.55	58.42	23	48	2-146497-4
[2.384]	[2.300]			
58.01	55.88	22	46	2-146497-3
[2.284]	[2.200]			
55.47	53.34	21	44	2-146497-2
[2.184]	[2.100]			
52.93	50.80	20	42	2-146497-1
[2.084]	[2.000]			
50.39	48.26	19	40	2-146497-0
[1.984]	[1.900]			
47.85	45.72	18	38	1-146497-9
[1.884]	[1.800]			
45.31	43.18	17	36	1-146497-8
[1.784]	[1.700]			
42.77	40.64	16	34	1-146497-7
[1.684]	[1.600]			
40.23	38.10	15	32	1-146497-6
[1.584]	[1.500]			
37.69	35.56	14	30	1-146497-5
[1.484]	[1.400]			
35.15	33.02	13	28	1-146497-4
[1.384]	[1.300]			
32.61	30.48	12	26	1-146497-3
[1.284]	[1.200]			
30.07	27.94	11	24	1-146497-2
[1.184]	[1.100]			
27.53	25.40	10	22	1-146497-1
[1.084]	[1.000]			
24.99	22.86	9	20	1-146497-0
[.984]	[.900]			
22.45	20.32	8	18	146497-9
[.884]	[.800]			
19.91	17.78	7	16	146497-8
[.784]	[.700]			
17.37	15.24	6	14	146497-7
[.684]	[.600]			
14.83	12.70	5	12	146497-6
[.584]	[.500]			
12.29	10.16	4	10	146497-5
[.484]	[.400]			
9.75	7.62	3	8	146497-4
[.384]	[.300]			
7.21	5.08	2	6	146497-3
[.284]	[.200]			
4.67	2.54	1	4	146497-2
[.184]	[.100]			
2.13	-	-	2	146497-1
[.084]	-	-		
G	F	E	NO. OF POSITIONS	PART NUMBER

RECOMMENDED HOLE LAYOUT

DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±. 2 PLC ±0.51 (.02) 3 PLC ±0.127 (.005) 4 PLC ±0.0127 (.0005) ANGLES ±.		DWN I. HOFFMAN 6/20/96 CHK G. DUBNICKI APVD G. DUBNICKI PRODUCT SPEC APPLICATION SPEC WEIGHT - CUSTOMER DRAWING		AMP Incorporated Harrisburg, PA 17105-3508 NAME HEADER ASSEMBLY, MOD 11, STACKING, DOUBLE ROW, .025 SQ. POST, UNSHROUDED SIZE A1 CAGE CODE 00779 DRAWING NO. 146497 SCALE 4:1 SHEET 1 OF 1 REV 0	
-------------------	--	--	--	---	--	---	--

- [Home](#)
- [Part Number Search](#)
- [Document Search](#)
- [Text Search](#)
- [Alternate Part Search](#)
- [Multiple Part Comparison](#)
- [Alphabetical Search](#)
- [Brand Search](#)
- [Industry Product Search](#)
- [Product Type Search](#)
- [Product Family Search](#)
- [Competitor Cross Reference](#)
- [Lead Free Solutions](#)
- [Help/Glossary](#)

<b>Current Brand View</b>	<a href="#">View All Tyco Electronics Brands</a> Click to activate links to all other products
<b>AMP</b>	

**AMPMODU**  
**.100 & .150 Centerline Through Hole Headers**

**AMP**    **146497-1**    **Active**    [Active](#)  
**(Tyco Electronics P/N: 146497-1)**

[Search for Parts](#) | [Previous](#) **1** [2](#) [3](#) [4](#) [Next](#)

Document links for this part cannot be displayed. Your browser does not support inline frames or is currently configured not to display inline frames. Inline frames are supported in both Internet Explorer 5 and Netscape 6, as well as all later versions of these browsers.

Related Part Information		
General Information	eCommerce	Related Part Information
<a href="#">General Info</a> <a href="#">Sales Info</a> <a href="#">Assembly Subcontractors</a>	<a href="#">Pricing</a> <a href="#">Product Availability</a>	

Searchable Features:	
<b>Brand:</b>	AMP
<b>Header Type:</b>	Stacking
<b>No. of Rows:</b>	Dual
<b>No. of Positions:</b>	2
<b>Mount Angle:</b>	Vertical
<b>PCB Retention Feature:</b>	Without
<b>Surface Mount Compatible:</b>	No
<b>Contact Mating Area Plating:</b>	Gold (15)
<b>Board Standoff:</b>	Without
<b>Mounting Ears:</b>	Without
<b>Panel Attachment:</b>	No
<b>Mating Connector Lock:</b>	Without
<b>High Temperature Housing:</b>	No

Other Properties:	
<b>Centerline, Matrix (mm [in]):</b>	2.54 x 2.54 [.100 x .100]
<b>Mating Post Length (mm [in]):</b>	8.38 [0.330]
<b>Housing Material:</b>	Thermoplastic
<b>Contact Termination Area Plating:</b>	Tin-Lead (100) over Nickel (50)
<b>Housing Color:</b>	Black
<b>Gender:</b>	Header

<b>High Speed Serial Data Connector:</b>	No
<b>Termination Post Length (mm [in]):</b>	26.16 [1.030]
<b>Stack Height (mm [in]):</b>	15.24 [0.600]

---

[Copyright](#) and [Privacy Statement](#)

Visit [Tyco International, Ltd.](#)

[Products](#) | [Catalog](#) | [Brands](#) | [Industries](#) | [Commerce](#) | [Supplier](#) | [Customer Service](#) | [About](#) | [Home](#)