


HIGH EFFICIENCY GLASS PASSIVATED RECTIFIERS	REVERSE VOLTAGE - 50 to 1000Volts FORWARD CURRENT - 8.0 Amperes
--	--

FEATURES

- Low switching noise
- Low forward voltage drop
- Low thermal resistance
- High current capability
- High fast switching capability
- High surge capacity

MECHANICAL DATA

- Case: ITO-220AC molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: MIL-STD-202E method 208C guaranteed
- Mounting position :Any
- Weight: 2.24 grams

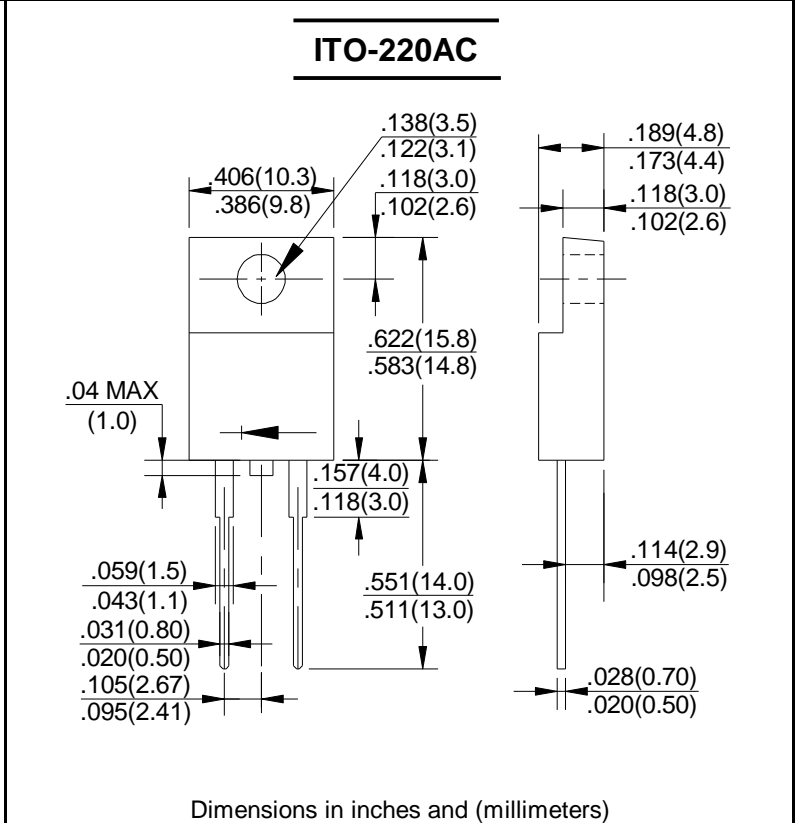

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave ,60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	HERF	HERF	HERF	HERF	HERF	HERF	HERF	HERF	UNIT
		801	802	803	804	805	806	807	808	
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	300	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	210	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	300	400	600	800	1000	V
Maximum Average Forward Rectified Current @ T _A =75 °C	I _O	8.0								A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load(JEDEC Method)	I _{FSM}	150								A
Typical Thermal Resistance	R _{θJA}	2.5								°C/W
Typical Junction Capacitance (Note2)	C _J	40								pF
Peak Instantaneous Forward Voltage at 8.0A DC	V _F	1.0		1.3		1.7				V
Maximum DC Reverse Current @ T _J =25°C at Rated DC Blocking Voltage @ T _J =100°C	I _R	10								μA
Maximum Reverse Recovery Time(Note1)	T _{RR}	60								nS
Operating and Storage Temperature Range	T _J ,T _{STG}	-55 to + 150								°C

NOTES:1.Measured with I_F=0.5A,I_R=1A,I_{RR}=0.25A
 2.Measured at 1.0 MHZ and applied reverse voltage of 4.0V DC.

