



DATA SHEET

SB1020F~SB10150F

ISOLATION SCHOTTKY BARRIER RECTIFIERS

VOLTAGE 20 to 150 Volts **CURRENT** 10 Amperes

ITO-220AC Unit : inch (mm)

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O. Flame Retardant Epoxy Molding Compound.
- Exceeds environmental standards of MIL-S-19500/228
- Low power loss, high efficiency.
- Low forward voltage, high current capability
- High surge capacity.
- For use in low voltage, high frequency inverters free wheeling, and polarity protection applications.
- Pb free product are available : 99% Sn above can meet Rohs environment substance directive request

MECHANICAL DATA


Case: ITO-220AC Molded plastic

Terminals: Solder plated, solderable per MIL-STD-202G, Method 208

Polarity: As marked.

Standard packaging: Any

Weight: 0.08 ounces, 2.24grams.

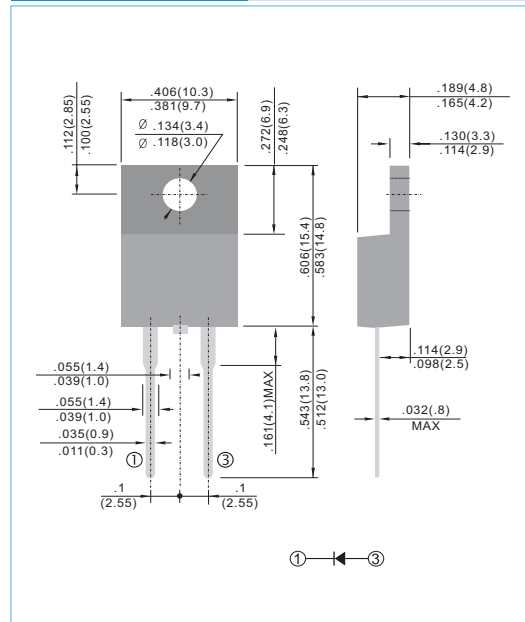

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

PARAMETER	SYMBOL	SB1020F	SB1030F	SB1040F	SB1050F	SB1060F	SB1080F	SB10100F	SB10150F	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	80	100	150	V
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	56	70	105	V
Maximum DC Blocking Voltage	V _{DC}	20	30	40	50	60	80	100	150	V
Maximum Average Forward Current .375" (9.5mm) lead length at T _c = 100°C	I _{AV}	10								A
Peak Forward Surge Current :8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	150								A
Maximum Forward Voltage at 10A,	V _F	0.55		0.75		0.85		0.92		V
Maximum DC Reverse Current at TA=25°C Rated DC Blocking Voltage TA=100°C	I _R					0.5 50				mA
Typical Thermal Resistance	R _{θJC}					3.0				°C / W
Operating Junction and Storage Temperature Range	T _J , T _{STG}	-50 TO +125								°C

Note.

Both Bonding and Chip structure are available.



RATING AND CHARACTERISTIC CURVES

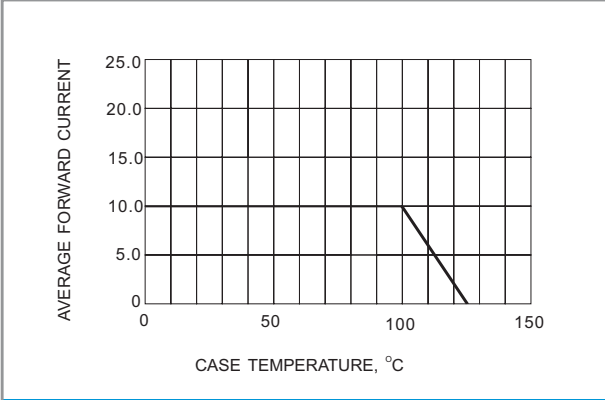


Fig.1- FORWARD CURRENT DERATING CURVE

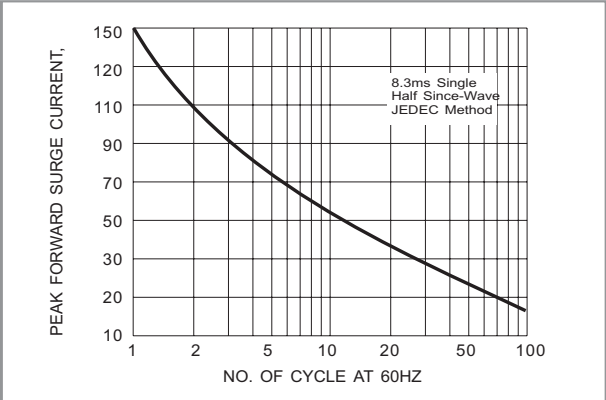


Fig.2- MAXIMUM NON-REPETITIVE SURGE CURRENT

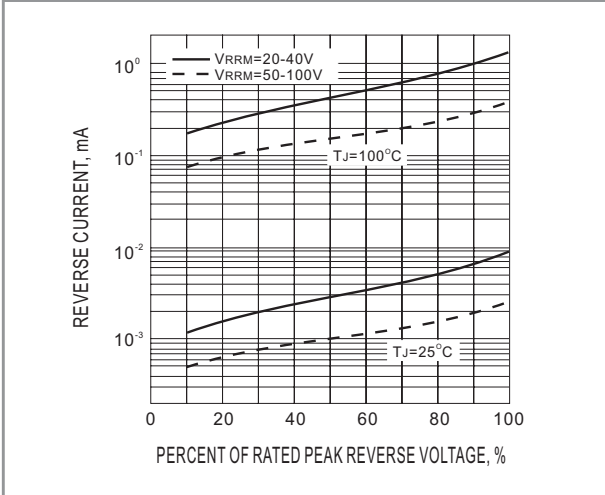


Fig.3- TYPICAL REVERSE CHARACTERISTIC

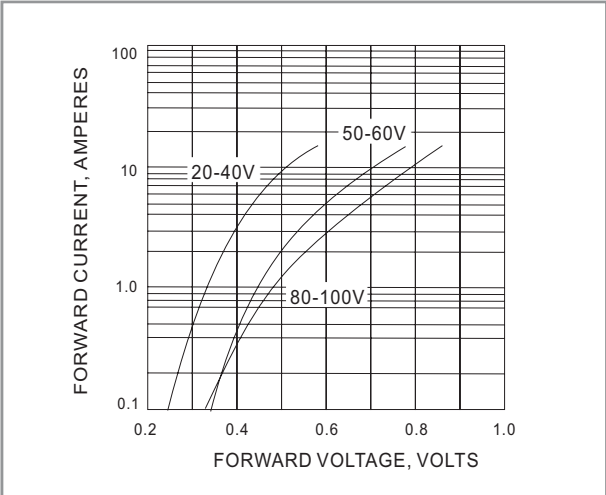


Fig.4- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC