


Ultrafast Plastic Rectifier

Major Ratings and Characteristics

$I_{F(AV)}$	3.0 A
V_{RRM}	400 V
I_{FSM}	60 A
t_{rr}	30 ns
V_F	1.25 V
$T_j \text{ max.}$	150 °C

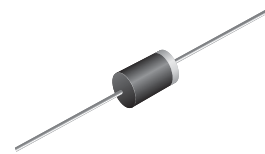

DO-201AD

Features

- Glass passivated chip junction
- Ultrafast reverse recovery time
- Low forward voltage drop
- Low switching losses, high efficiency
- High forward surge capability
- Solder Dip 260 °C, 40 seconds



Typical Applications

For use in high frequency rectification and freewheeling application in switching mode converters and inverters for consumer, computer and Telecommunication

Mechanical Data

Case: DO-201AD

Epoxy meets UL-94V-0 Flammability rating

Terminals: Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D

E3 suffix for commercial grade

Polarity: Color band denotes cathode end

Maximum Ratings

$T_A = 25\text{ °C}$ unless otherwise specified

Parameter	Symbol	Value	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	400	V
Maximum RMS voltage	V_{RMS}	280	V
Maximum DC blocking voltage	V_{DC}	400	V
Maximum average forward rectified current, 0.375" (9.5 mm) lead length	$I_{F(AV)}$	3.0 1.5	A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	I_{FSM}	60	A
Operating junction and storage temperature range	T_J, T_{STG}	- 40 to + 150	°C
Reverse Avalanche Energy (8/20 μ s surge)	E_{AR}	10	mJ

Electrical Characteristics

$T_A = 25\text{ }^\circ\text{C}$ unless otherwise specified

Parameter	Test condition	Symbol	Value	Unit
Minimum reverse breakdown voltage	at 10 μA	$V_{(BR)}$	400	V
Maximum instantaneous forward voltage	at 3.0 A ⁽¹⁾	V_F	1.25	V
Maximum DC reverse current at rated DC blocking voltage		I_R	20	μA
Maximum reverse recovery time	at $I_F = 0.5\text{ A}$, $I_R = 1.0\text{ A}$, $I_{rr} = 0.25\text{ A}$	t_{rr}	30	ns

Thermal Characteristics

$T_A = 25\text{ }^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Value	Unit
Typical thermal resistance ⁽¹⁾ Junction-to-ambient	$R_{\theta JA}$	80	$^\circ\text{C/W}$

Notes:

(1) Pulse test: 300 μs pulse width, 1 % duty cycle

Ratings and Characteristics Curves

($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

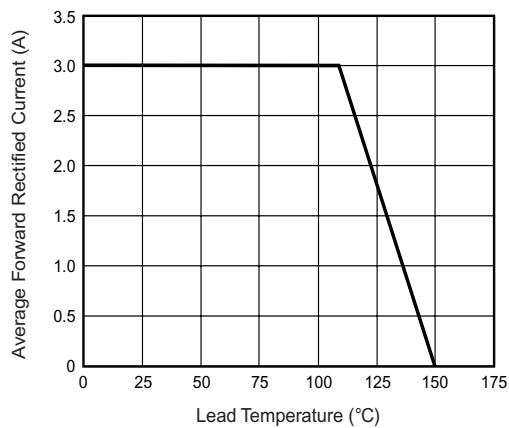


Figure 1. Maximum Forward Current Derating Curve

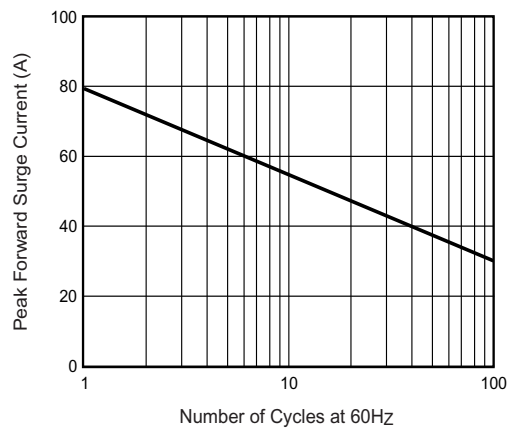


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current

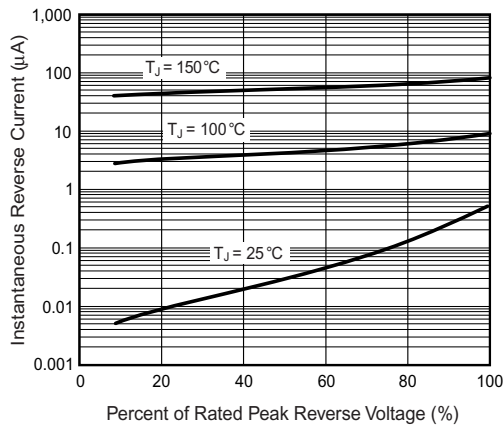


Figure 3. Typical Reverse Characteristics

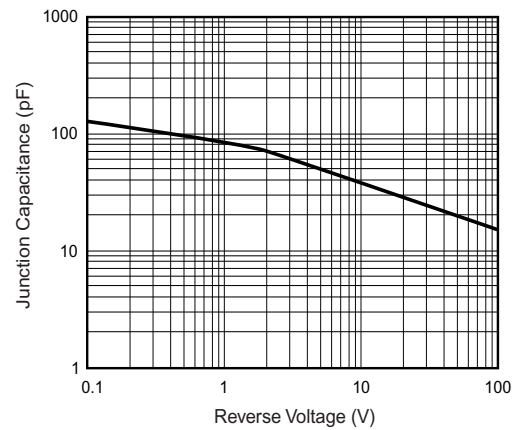


Figure 5. Typical Junction Capacitance


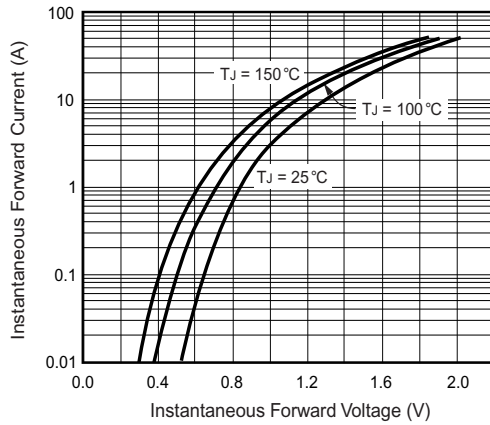


Figure 4. Typical Instantaneous Forward Characteristics

Package outline dimensions in inches (millimeters)



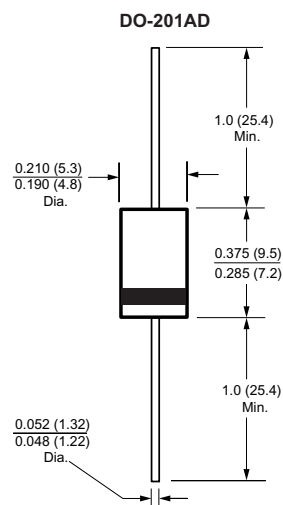

Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.