


2.0mm SINGLE ROW HEADER

HORIZONTAL S.M.D. TYPE

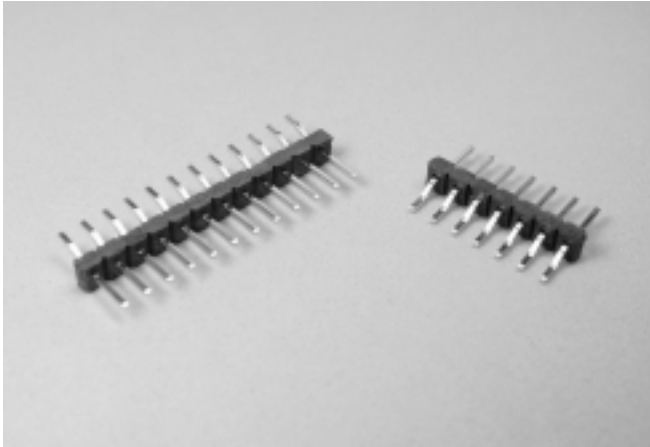


200111MB Series

Mates With SUYIN 200123,200130,200160 Series

Specifications:

- **2-40 Circuits**
- **Insulator Material** : Black High Temp . Plastic
- **Operating Temp. Range** : -40°C to +105°C
- **Terminal Material** : Brass 65/35
- **Plating** : Contact-Selective Gold Plated
or Full Gold Plated
- **Max. Current Rating** : 1.5A
- **Voltage Rating** : 150V AC
- **Dielectric Strength** : 500V (Min. 60 Seconds)

2.0
mm

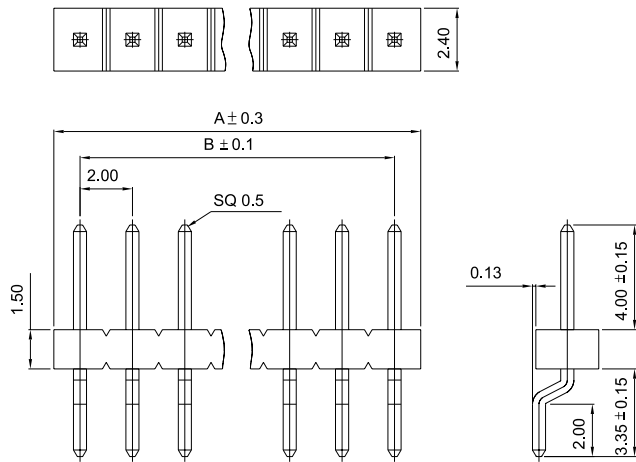

Order Information


200111MB□□□□□00Z□
1 2 3 4 5

1. 'B' : Right Angle SMT Type
2. No. of Pins
3. Plating
4. Color 'Z' : Black
5. Package

'O' : Slim Box Package Without
CAP

Reference Page 11

Recommended P.C.B Layout

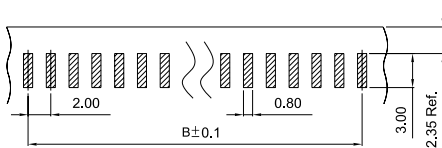

Dimensional Information

SUYIN P/NO.	DIM.A	DIM.B	SUYIN P/NO.	DIM.A	DIM.B
200111MB002□□00Z□	4.3	2.0	200111MB022□□00Z□	44.3	42.0
200111MB003□□00Z□	6.3	4.0	200111MB023□□00Z□	46.3	44.0
200111MB004□□00Z□	8.3	6.0	200111MB024□□00Z□	48.3	46.0
200111MB005□□00Z□	10.3	8.0	200111MB025□□00Z□	50.3	48.0
200111MB006□□00Z□	12.3	10.0	200111MB026□□00Z□	52.3	50.0
200111MB007□□00Z□	14.3	12.0	200111MB027□□00Z□	54.3	52.0
200111MB008□□00Z□	16.3	14.0	200111MB028□□00Z□	56.3	54.0
200111MB009□□00Z□	18.3	16.0	200111MB029□□00Z□	58.3	56.0
200111MB010□□00Z□	20.3	18.0	200111MB030□□00Z□	60.3	58.0
200111MB011□□00Z□	22.3	20.0	200111MB031□□00Z□	62.3	60.0
200111MB012□□00Z□	24.3	22.0	200111MB032□□00Z□	64.3	62.0
200111MB013□□00Z□	26.3	24.0	200111MB033□□00Z□	66.3	64.0
200111MB014□□00Z□	28.3	26.0	200111MB034□□00Z□	68.3	66.0
200111MB015□□00Z□	30.3	28.0	200111MB035□□00Z□	70.3	68.0
200111MB016□□00Z□	32.3	30.0	200111MB036□□00Z□	72.3	70.0
200111MB017□□00Z□	34.3	32.0	200111MB037□□00Z□	74.3	72.0
200111MB018□□00Z□	36.3	34.0	200111MB038□□00Z□	76.3	74.0
200111MB019□□00Z□	38.3	36.0	200111MB039□□00Z□	78.3	76.0
200111MB020□□00Z□	40.3	38.0	200111MB040□□00Z□	80.3	78.0
200111MB021□□00Z□	42.3	40.0			