



# MBR16200C

**DIODE**

## 16A SCHOTTKY BARRIER RECTIFIER


### DESCRIPTION

The UTC **MBR16200C** is a Schottky Barrier Rectifier with high efficiency, low power dissipation and high current capacity. It can be applied in high frequency, low voltage inverters, polarity protection and free wheeling applications.

### FEATURES

- \* High surge capability
- \* High efficiency, low power dissipation, high current capability, low forward voltage drop
- \* Guardring for overvoltage protection

### SYMBOL





### ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
MBR16200CL-TA3-T	MBR16200CG-TA3-T	TO-220	A	K	A	Tube
MBR16200CL-TF3-T	MBR16200CG-TF3-T	TO-220F	A	K	A	Tube
MBR16200CL-TQ2-T	MBR16200CG-TQ2-T	TO-263	A	K	A	Tube
MBR16200CL-TQ2-R	MBR16200CG-TQ2-R	TO-263	A	K	A	Tape Reel

Note: Pin Assignment: A: Anode K: Cathode

<p>MBR16200CG-TA3-T</p> <p>(1) Packing Type</p> <p>(2) Package Type</p> <p>(3) Green Package</p>	<p>(1) T: Tube, R: Tape Reel</p> <p>(2) TA3: TO-220, TF3: TO-220F, TQ2: TO-263</p> <p>(3) G: Halogen Free and Lead Free, L: Lead Free</p>
--	---

### MARKING

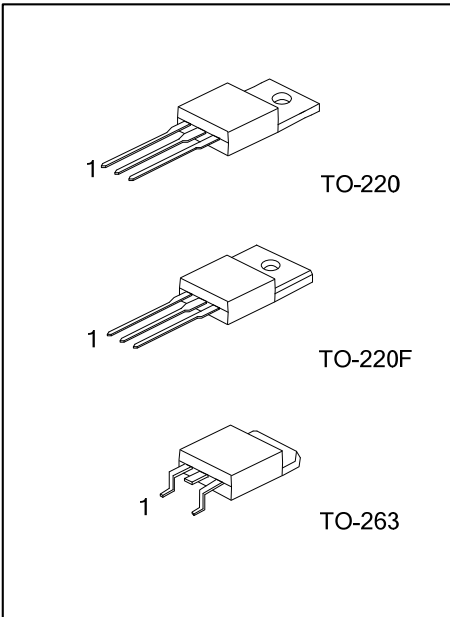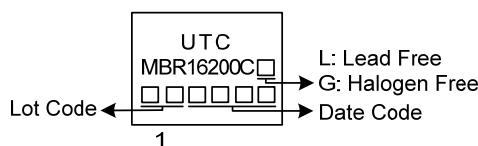

■ ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub>=25°C unless otherwise specified)

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitance load, derate current by 20%.

PARAMETER		SYMBOL	RATINGS	UNIT
DC Blocking Voltage		V <sub>RM</sub>	200	V
Working Peak Reverse Voltage		V <sub>RWM</sub>	200	V
Peak Repetitive Reverse Voltage		V <sub>RRM</sub>	200	V
RMS Reverse Voltage		V <sub>R(RMS)</sub>	140	V
Average Rectified Output Current (T <sub>C</sub> =105°C)	Per Leg	I <sub>O</sub>	8	A
	Total		16	A
Non-Repetitive Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load		I <sub>FSM</sub>	150	A
Operating Junction Temperature		T <sub>J</sub>	+150	°C
Storage Temperature		T <sub>STG</sub>	-55 ~ +150	°C

Note: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Thermal resistance junction to case mounted on heatsink.

■ THERMAL CHARACTERISTICS

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient		θ <sub>JA</sub>	60	°C/W
Junction to Case	TO-220	θ <sub>JC</sub>	2	°C/W
	TO-263			
	TO-220F			




■ ELECTRICAL CHARACTERISTICS (Per Leg) (T<sub>A</sub>=25°C, unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Reverse Breakdown Voltage (Note 1)	V <sub>(BR)R</sub>	I <sub>R</sub> =0.5mA	200			V
Forward Voltage Drop	V <sub>FM</sub>	I <sub>F</sub> =8A, T <sub>J</sub> =25°C			0.9	V
		I <sub>F</sub> =8A, T <sub>J</sub> =125°C			0.8	V
Leakage Current (Note 1)	I <sub>RM</sub>	V <sub>R</sub> =200V, T <sub>J</sub> =25°C			50	µA
		V <sub>R</sub> =200V, T <sub>J</sub> =125°C			20	mA
Type junction capacitance	C <sub>J</sub>	V <sub>R</sub> =4.0V, f=1MHz		103		pF

Notes: 1. Short duration pulse test used to minimize self-heating effect.

2. Thermal resistance junction to case mounted on heatsink.

■ TYPICAL CHARACTERISTICS

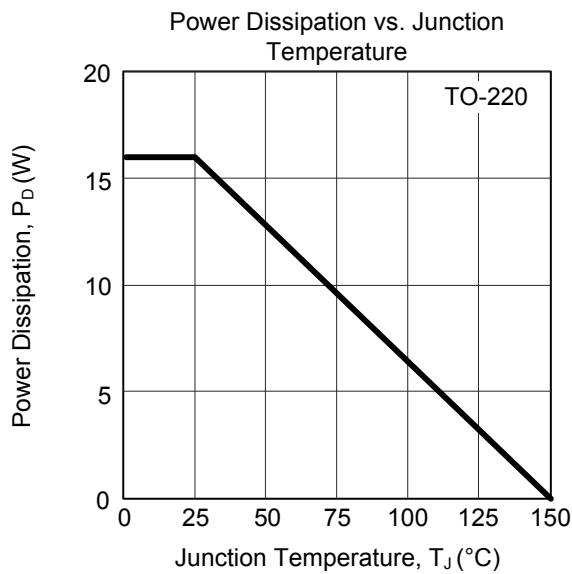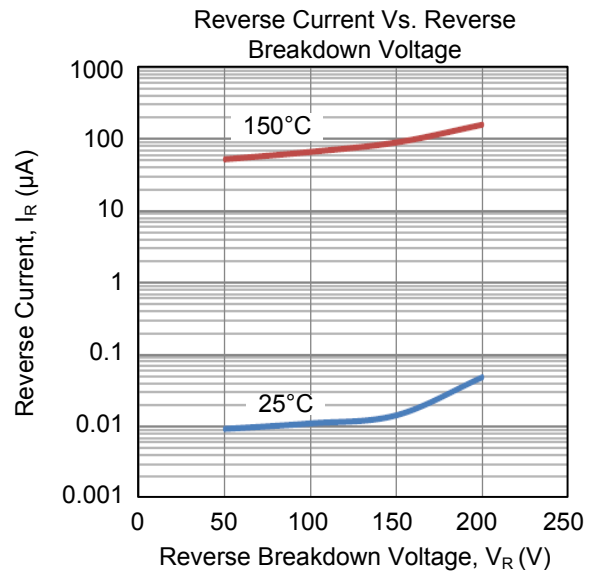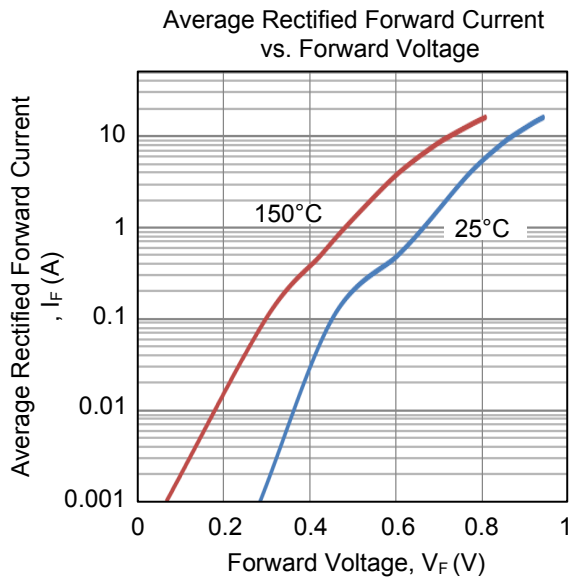

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.