


PRODUCT NO.
SEE CHART

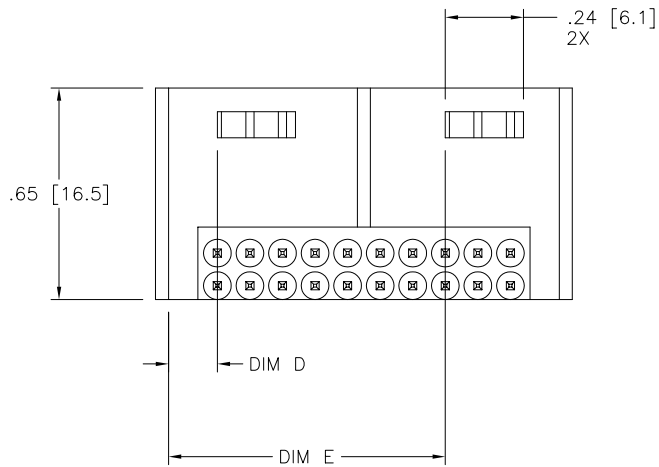

VIEW G-G

NOTES:

1. TERMINAL MAT'L: 3/4 HARD PHOS. BRONZE ALLOY. UNS-C51000.
2. PLATING: 30u" Au/0.76u OVER 50u"/1.27u Ni.
3. MOLDING MAT'L: PCT RETARDANT PER UL94V-0. COLOR - BLACK.
- ④ .02/0.51 MAX FLASH AROUND ALL WINDOWS.
- ⑤ COMPANY LOGO MOLDED IN ON DATUM SURFACE -S- APPROXIMATELY AS SHOWN.
- ⑥ .03/0.76 MAX FLASH PERMISSIBLE ON PINS, BOTH ENDS.
7. PALLADIUM PLATED PRODUCT HAS GOLD FLASH.
8. OTHER PLATINGS ARE AVAILABLE.
- ⑨ ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
- ⑩ THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- ⑪ THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.



Copyright FCI

mat'l. code		surface finish ISO 1302		tolerance ISO 1101		product family HEADERS		
ltr	ecn	no	dr	date		title		
c						RIGHT ANGLE HIGH TEMP HEADER FLAT CABLE RECEPTACLE		
angles		linear		.xx±.01/.3		INCH/MM		
0°±2'				.xxx±.005/.13		scale 2:1		
dr		M. CLOUSER		10/12/94		dwg no		
enr		L. FYE		10/12/94		sheet 2 of 3		
chr		L. FYE		10/12/94		size 95176 A3		
appd		L. FYE		10/12/94		type Product Customer Drawing		
sheet index	revision sheet							

PRODUCT NO. NOTE 9	NO. OF POS.	"A" SPACES	DIM B	DIM C	DIM D	DIM E	DIM F
95176-001	6	2	.200/5.08	.500/12.70	.150/3.81	-----	.130/3.30
-002	8	3	.300/7.62	.600/15.24	.150/3.81	-----	
-003	10	4	.400/10.16	.700/17.78	.250/6.35	-----	
-004	12	5	.500/12.70	.800/20.32	.250/6.35	-----	
-005	14	6	.600/15.24	.900/22.86	.350/8.89	-----	
-006	16	7	.700/17.78	1.000/25.40	.350/8.89	-----	
-007	18	8	.800/20.32	1.100/27.94	.450/11.43	-----	
-008	20	9	.900/22.86	1.200/30.48	.150/3.81	.850/21.59	
-009	22	10	1.000/25.40	1.300/33.02	.150/3.81	.950/24.13	
-010	24	11	1.100/27.94	1.400/35.56	.150/3.81	1.050/26.67	
-011	26	12	1.200/30.48	1.500/38.10	.150/3.81	1.150/29.21	
-012	28	13	1.300/33.02	1.600/40.64	.150/3.81	1.250/31.75	
-013	30	14	1.400/35.56	1.700/43.18	.150/3.81	1.350/34.29	
-014	32	15	1.500/38.10	1.800/45.72	.150/3.81	1.450/36.83	
-015	34	16	1.600/40.64	1.900/48.26	.150/3.81	1.550/39.37	
-016	36	17	1.700/43.18	2.000/50.80	.150/3.81	1.650/41.91	
-017	38	18	1.800/45.72	2.100/53.34	.150/3.81	1.750/44.45	
-018	40	19	1.900/48.26	2.200/55.88	.150/3.81	1.850/46.99	
-019	42	20	2.000/50.80	2.300/58.42	.150/3.81	1.950/49.53	
-020	44	21	2.100/53.34	2.400/60.96	.150/3.81	2.050/52.07	
-021	46	22	2.200/55.88	2.500/63.50	.150/3.81	2.150/54.61	
-022	48	23	2.300/58.42	2.600/66.04	.150/3.81	2.250/57.15	
-023	50	24	2.400/60.96	2.700/68.58	.150/3.81	2.350/59.69	
-024	52	25	2.500/63.50	2.800/71.12	.150/3.81	2.450/62.23	
-025	54	26	2.600/66.04	2.900/73.66	.150/3.81	2.550/64.77	
-026	56	27	2.700/68.58	3.000/76.20	.150/3.81	2.650/67.31	
-027	58	28	2.800/71.12	3.100/78.74	.150/3.81	2.750/69.85	
-028	60	29	2.900/73.66	3.200/81.28	.150/3.81	2.850/72.39	
-029	62	30	3.000/76.20	3.300/83.82	.150/3.81	2.950/74.93	
-030	64	31	3.100/78.74	3.400/86.36	.150/3.81	3.050/77.47	
-031	66	32	3.200/81.28	3.500/88.90	.150/3.81	3.150/80.01	
-032	68	33	3.300/83.82	3.600/91.44	.150/3.81	3.250/82.55	
-033	70	34	3.400/86.36	3.700/93.98	.150/3.81	3.350/85.09	
-034	72	35	3.500/88.90	3.800/96.52	.150/3.81	3.450/87.63	.130/3.30
-035	16	7	.700/17.78	1.000/25.40	.150/3.81	-----	.155/3.94
-036	40	19	1.900/48.26	2.200/55.88	.150/3.81	1.850/46.99	.155/3.94
-037	50	24	2.400/60.96	2.700/68.58	.150/3.81	2.350/59.69	.155/3.94
95176-038	I N A C T I V E						



Copyright FCI

mat'l. code		surface ISO 1302 <input checked="" type="checkbox"/>	tolerance ISO 406 ISO 1101	projection 	product family HEADERS
ltr	ecn	no	dr	date	tolerances unless otherwise specified
c					angles
					linear .xxx±.005/.13
					0°±2'
					.xxxx±.0020/.051
					dr M. CLOUSER 10/12/94
					enr L. FYE 10/12/94
					chr L. FYE 10/12/94
					appd L. FYE 10/12/94
sheet index	revision sheet				

RIGHT ANGLE HIGH TEMP HEADER		RIGHT ANGLE HIGH TEMP HEADER	
FLAT CABLE RECEPTACLE			
scale 2:1	title		
dwg no 95176 sheet 3 of 3 size A3			
type Product Customer Drawing			