
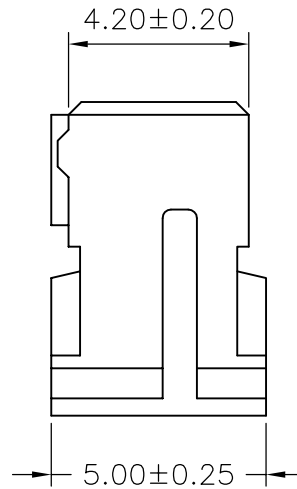
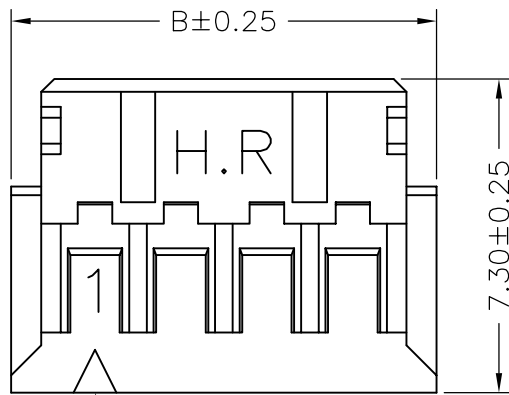
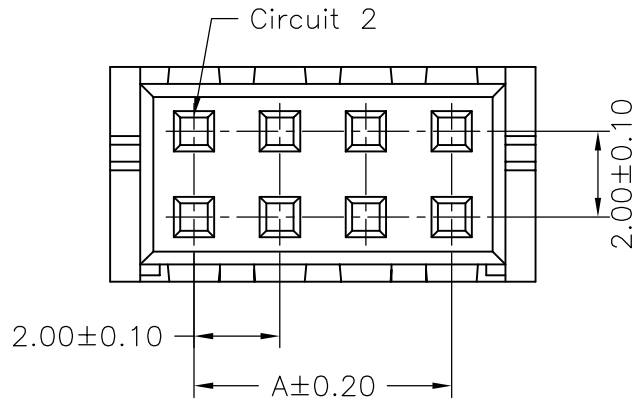


SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 800V AC/minute
 Material: Nylon 66,UL94V-0
 Color: Natural(White)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A2004H-2X02P	2.00	5.90
A2004H-2X03P	4.00	7.90
A2004H-2X04P	6.00	9.90
A2004H-2X05P	8.00	11.90
A2004H-2X06P	10.00	13.90
A2004H-2X07P	12.00	15.90
A2004H-2X08P	14.00	17.90
A2004H-2X09P	16.00	19.90
A2004H-2X10P	18.00	21.90
A2004H-2X11P	20.00	23.90
A2004H-2X12P	22.00	25.90
A2004H-2X13P	24.00	27.90
A2004H-2X14P	26.00	29.90
A2004H-2X15P	28.00	31.90
A2004H-2X16P	30.00	33.90
A2004H-2X17P	32.00	35.90
A2004H-2X18P	34.00	37.90
A2004H-2X19P	36.00	39.90
A2004H-2X20P	38.00	41.90
A2004H-2X22P	42.00	45.90

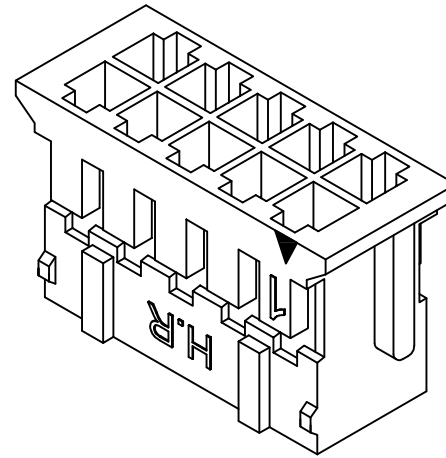

Circuit 1

Circuit 2



JOINT TECH ELECTRONIC IND. CO., LTD.
 JOY DAY INDUSTRIAL CO., LTD.

UNIT: mm
 SCALE: 1 of 1

DRAWN BY: 董正一
 2001.02.01
 APPROVED BY: 董正一
 2001.02.01

GENERAL TOLERANCE

B1	REVISE	2007.07.06	X. X±0.25	ANGLE±
B0	NEW RELEASE	2006.05.13	X. XX±0.15	
REV.	DESCRIPTION	DATE	X. XXX±0.05	

TITLE:
2.00mm PITCH HOUSING

DRAW NO.: A2004H-2XNP

REV. B1