



KBPC15, 25, 35, 50 SERIES

HIGH CURRENT 15, 25, 35, 50 AMPS. SINGLE PHASE BRIDGE RECTIFIERS



FEATURES

- * Metal case with an electrically isolated mylar
- * Rating to 1,000V PRV
- * High efficiency
- * Mounting: thru hole for # 10 screw
- * High temperature soldering guaranteed: 260°C/10 seconds at 5 lbs. , (2.3 kg) tension
- * Terminals solderables per MIL - STD - 202. method 208
- * Isolated voltage from case to lead over 2000 volts

VOLTAGE RANGE



50 to 1000V

CURRENT

15.0/25.0/35.0/50.0 Amperes

KBPC-W

KBPC

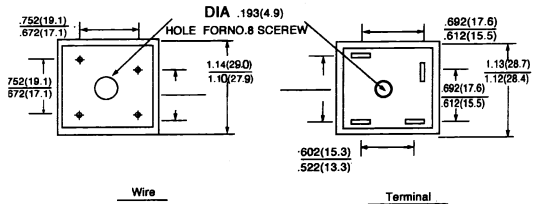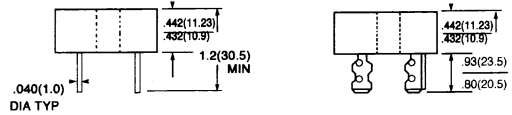

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

60 Hz, resistive or inductive load. For capacitive load, derate current by 20%

TYPE NUMBER	SYMBOLS	-00	-01	-02	-04	-06	-08	-10	UNITS	
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V	
Maximum D. C Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V	
Maximum Average Forward Rectified Output Current @ $T_C = 55^\circ C$ (See Fig. 1)	$I_{F(AV)}$	KBPC15 15.0 KBPC25 25.0 KBPC35 35.0 KBPC50 50.0								A
Peak Forward Surge Current single sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	KBPC15 200 KBPC25 300 KBPC35 - KBPC50 400								A
Maximum Instantaneous Forward Voltage Drop per Element at Specified Current	V_F	KBPC15 7.5A KBPC25 12.5A KBPC35 17.5A KBPC50 25.0A				1.10				V
Maximum Reverse DC Current at Rated D. C Blocking Voltage per Element	I_R					10.0				μA
Typical Thermal Resistance <1>	$R_{\theta JC}$					2.0				$^\circ C/W$
Operating and Storage Temperature Range	T_J/T_{STG}	-50 to +125				/ -50 to +150				$^\circ C$

Notes: 1. Thermal Resistance from Junction to Case Per leg.

2. Bolt down on heatsink with silicone thermal compound between bridge and mounting surface for maximum heat transfer with # 10 screw

3. Suffix "W" - Wire Lead Structure.

RATINGS AND CHARACTERISTIC CURVES (KBPC15 THRU KBPC50)

1500 1510
2500 2510
3500 3510
5000 5010

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

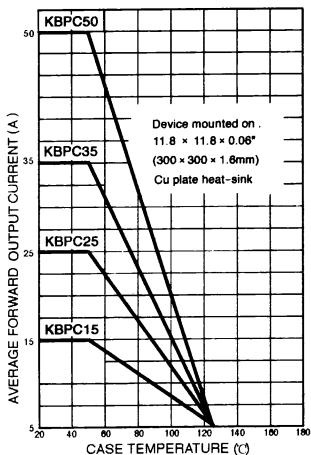


FIG. 2 - MAXIMUM NON-REPETITIVE SURGE CURRENT - PER ELEMENT

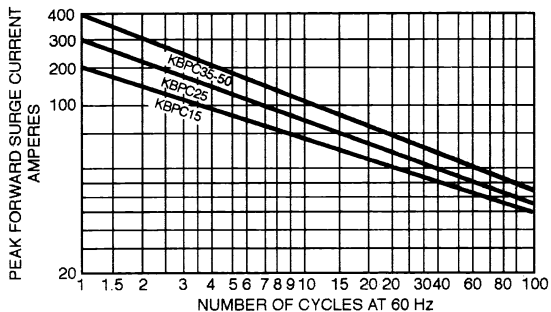


FIG. 4 - TYPICAL FORWARD CHARACTERISTICS - PER ELEMENT

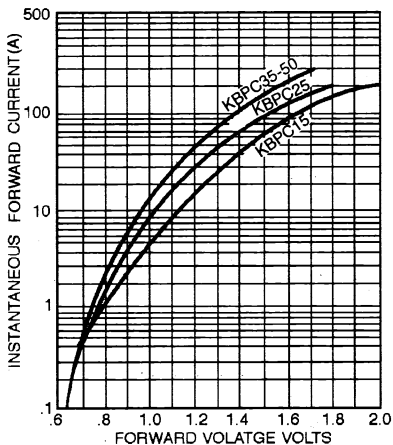


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS PER ELEMENT

