

Obsolete

M.C.C.

Micro Commercial Components

RoHS COMPLIANT

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

2N3501

NPN
BIPOLAR
TRANSISTOR

150 Volts
500mAmps
TO-39 Package

Features


- Meets MIL-S-19500/366
Collector-Base Voltage 150V
Collector Current: 500 mA
Fast Switching 1265 nS
Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates RoHS Compliant. See ordering information)

Maximum Ratings

Table with 4 columns: RATING, SYMBOL, MAX., UNIT. Rows include Collector-Emitter Voltage, Collector-Base Voltage, Emitter-Base Voltage, Collector Current—Continuous, Total Device Dissipation @ TA = 25°C, Total Device Dissipation @ TC = 25°C, Operating Temperature Range, Storage Temperature Range, Thermal Resistance, Junction to Ambient, Thermal Resistance, Junction to Case.

Notes:1.High Temperature Solder Exemption Applied, see EU Directive Annex 7.

Mechanical Outline

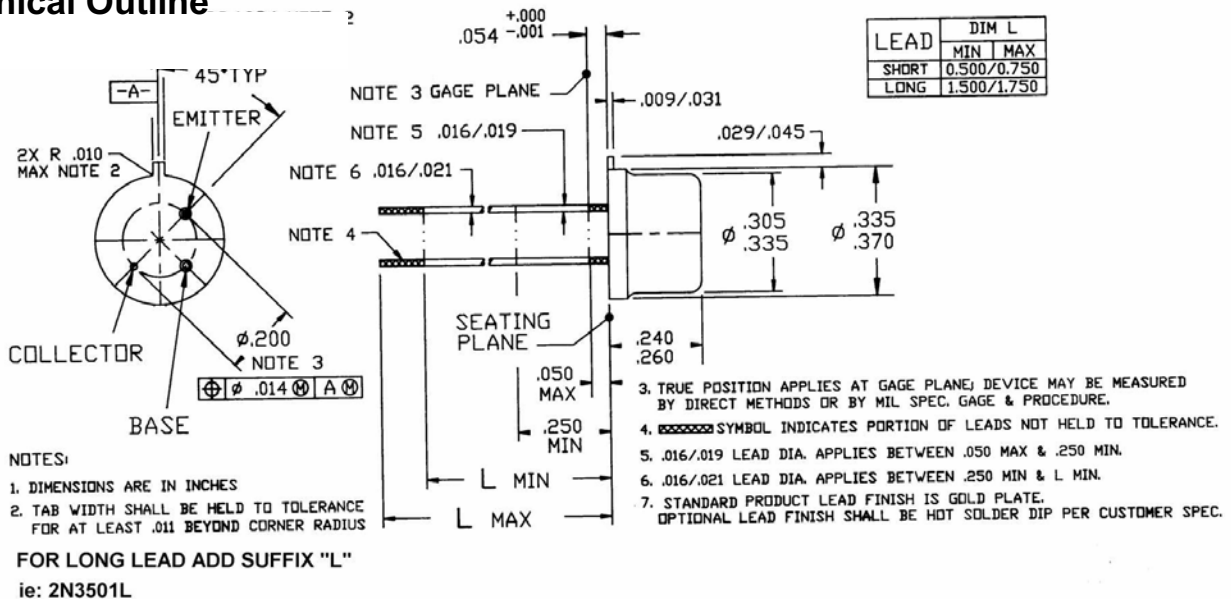

www.mccsemi.com

2N3501

Electrical Parameters (T_A @ 25°C unless otherwise specified)

CHARACTERISTICS	SYMBOL	MIN.	TYP.	MAX.	UNIT
Off Characteristics					
Collector-Emitter Breakdown Voltage(1) (I _C = 10 mAdc, I _B = 0)	BV_{CEO}	150	--	--	Vdc
Collector-Base Breakdown Voltage (I _C = 10 μAdc, I _E = 0)	BV_{CBO}	150	--	--	Vdc
Emitter-Base Breakdown Voltage (I _E = 10 μAdc, I _C = 0)	BV_{EBO}	6.0	--	--	Vdc
Collector Cutoff Current (V _{CB} = 75 Vdc, I _E = 0) (V _{CB} = 75 Vdc, I _E = 0, T _A = 150°C)	I_{CBO}	--	--	0.05 50	μAdc
Emitter Cutoff Current (V _{EB(off)} = 4.0 Vdc, I _C = 0)	I_{EBO}	--	--	25	nAdc
D.C. Current Gain (I _C = 0.1 mAdc, V _{CE} = 10 Vdc) (I _C = 1.0 mAdc, V _{CE} = 10 Vdc) (I _C = 10 mAdc, V _{CE} = 10 Vdc)(1) (I _C = 150 mAdc, V _{CE} = 10 Vdc)(1) (I _C = 150 mAdc, V _{CE} = 10Vdc) @ 55°C (I _C = 300 mAdc, V _{CE} = 10 Vdc)(1)	h_{FE}	35 50 75 100 45 20	-- -- -- -- -- --	-- -- -- 300 -- --	--
Collector-Emitter Saturation Voltage(1) (I _C = 10 mAdc, I _B = 1.0 mAdc) (I _C = 150 mAdc, I _B = 15 mAdc)	V_{CE(Sat)}	-- --	-- --	0.2 0.4	Vdc
Base-Emitter Saturation Voltage(1) (I _C = 10 mAdc, I _B = 1.0 mAdc) (I _C = 150 mAdc, I _B = 15 mAdc)	V_{BE(Sat)}	-- --	-- --	0.8 1.2	Vdc
Magnitude of common emitter small-signal short-circuit forward current transfer ratio (V _{CE} = 20 Vdc, I _C = 20 mAdc, f = 100 MHz)	 h_{fe} 	1.5	--	8 --	
Output Capacitance (V _{CB} = 10 Vdc, I _E = 0, 100kHz ≤ f ≤ 1MHz)	C_{OBO}	--	--	8.0	pf
Input Capacitance (V _{EB} = 0.5 Vdc, I _C = 0, 100kHz ≤ f ≤ 100MHz)	C_{IBO}	--	--	80	pf
Small -signal Current Gain (I _C = 10mAdc, V _{CE} = 10Vdc, f = 1.0 kHz)	h_{fe}	75	--	300	
Noise figure (V _{CE} = 10Vdc, I _C = 0.5mAdc; R _g = 1kohms, f = 1MHz)	NF			16	dB
Noise figure (V _{CE} = 10Vdc, I _C = 0.5mAdc; R _g = 1kohms, f = 1MHz)	NF			6	dB
Turn - on time (V _{EB} = 12Vdc, I _C = 150mAdc, I _{B1} = 15mAdc)	t_{on}			115	nS
Turn - off time (I _C = 150mAdc, I _{B1} = I _{B2} = -15mAdc)	t_{off}			1150	nS

(1) Pulse Test: Pulse Width ≤ 300 ms, Duty Cycle ≤ 2.0%



Micro Commercial Components

Ordering Information :

Device	Packing
Part Number-BP	Bulk; 50pcs/Box

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

*****LIFE SUPPORT*****

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

*****CUSTOMER AWARENESS*****

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.