SPECIFICATIONS

Jumper Connector

SJ25 Series
2.54mm [.100”] Pitch

Mechanical
Contact Retention Force: *0.45kg min.*
Insertion Force: *420g max.*
Withdrawal Force: *28g min.*

Electrical
Voltage Rating: *250V*
Current Rating: *3.0A*
Dielectric Withstanding Voltage: *750V AC*
Insulation Resistance: *1000MΩ*

Physical
Housing: *Thermoplastic, UL 94V-0 rated*
Contact: *Copper alloy*
Plating: *See “ORDERING INFORMATION”*
Operating Temperature: *-40℃ to +105℃*



DRAWING

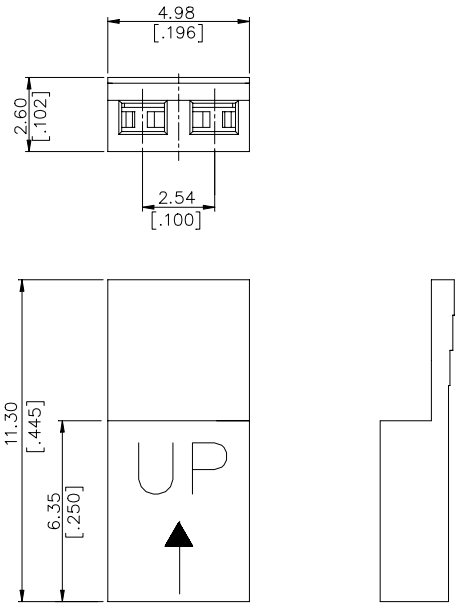

ORDERING INFORMATION

PRODUCT NO.:S J 2 5 2 0 * - A *

- Socket
- Jumper
- Termination & Contact Type
- 2.54 mm. Center Line
- 0=Loose Piece
- Contact Area Plating
  - 1=Gold Flash
  - 7=15u" Gold
  - F=Gold Flash With Lead Free
  - V=15u" Gold With Lead Free
- Modification Code
  - A0=Color Black
  - A1=Color Blue
  - A2=Color Green
  - A3=Color Yellow
  - A4=Color Red
  - A5=Color White

All specification & dimensions are subject to change, please call your nearest Foxconn sales representative for update information.