



MJD122
MJD127

COMPLEMENTARY SILICON POWER DARLINGTON TRANSISTORS

- STMicroelectronics PREFERRED SALESTYPES
- LOW BASE-DRIVE REQUIREMENTS
- INTEGRATED ANTIPARALLEL COLLECTOR-EMITTER DIODE
- SURFACE-MOUNTING TO-252 (DPAK) POWER PACKAGE IN TAPE & REEL (SUFFIX "T4")
- ELECTRICAL SIMILAR TO TIP122 AND TIP127



APPLICATIONS

- GENERAL PURPOSE SWITCHING AND AMPLIFIER.

DESCRIPTION

The MJD122 and MJD127 form complementary NPN - PNP pairs.

They are manufactured using Epitaxial Base technology for cost-effective performance.

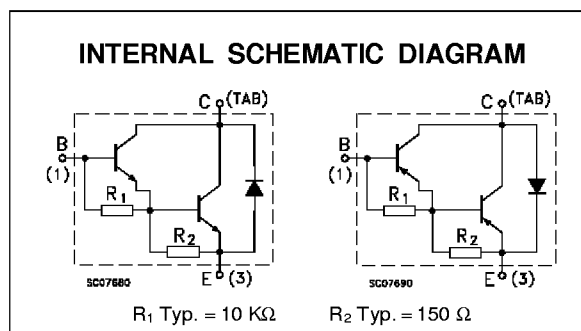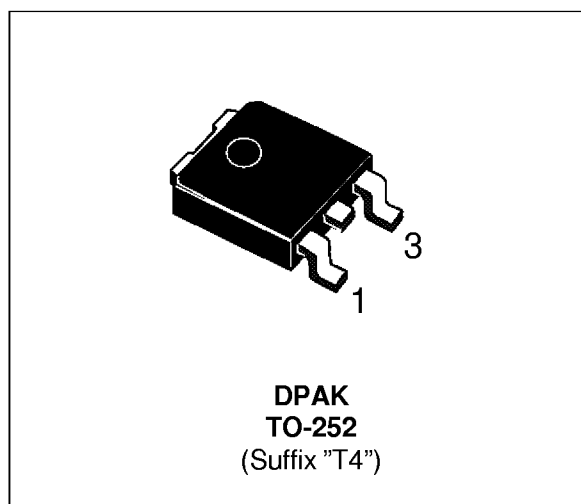

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value		Unit	
		NPN	MJD122		
V _{CBO}	Collector-Base Voltage (I _E = 0)	PNP	MJD127	100	V
V _{CEO}	Collector-Emitter Voltage (I _B = 0)			100	V
V _{EB0}	Emitter-Base Voltage (I _C = 0)			5	V
I _C	Collector Current			5	A
I _{CM}	Collector Peak Current			8	A
I _B	Base Current			100	mA
P _{tot}	Total Dissipation at T _{case} ≤ 25 °C			20	W
T _{stg}	Storage Temperature			-65 to 150	°C
T _j	Max. Operating Junction Temperature			150	°C

For PNP types voltage and current values are negative.

MJD122 MJD127

THERMAL DATA


$R_{thj-case}$	Thermal Resistance Junction-case	Max	6.25	$^{\circ}C/W$
$R_{thj-amb}$	Thermal Resistance Junction-ambient	Max	100	$^{\circ}C/W$

ELECTRICAL CHARACTERISTICS ($T_{case} = 25^{\circ}C$ unless otherwise specified)


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{CBO}	Collector Cut-off Current ($I_E = 0$)	$V_{CB} = 100 V$			10	μA
I_{CEO}	Collector Cut-off Current ($I_B = 0$)	$V_{CE} = 50 V$			10	μA
I_{CEX}	Collector Cut-off Current	$V_{CE} = 100 V$ $V_{BE} = -1.5V$ $V_{CE} = 100 V$ $V_{BE} = -1.5V$ $T_C = 125^{\circ}C$			10 500	μA μA
I_{EBO}	Emitter Cut-off Current ($I_C = 0$)	$V_{EB} = 5 V$			2	mA
$V_{CEO(sus)}$	Collector-Emitter Sustaining Voltage	$I_C = 30 mA$	100			V
$V_{CE(sat)*}$	Collector-Emitter Saturation Voltage	$I_C = 4 A$ $I_B = 16 mA$ $I_C = 8 A$ $I_B = 80 mA$			2 4	V V
$V_{BE(sat)*}$	Base-Emitter Saturation Voltage	$I_C = 8 A$ $I_B = 80 mA$			4.5	V
$V_{BE(on)*}$	Base-Emitter Voltage	$I_C = 4 A$ $V_{CE} = 4 V$			2.8	V
h_{FE*}	DC Current Gain	$I_C = 4 A$ $V_{CE} = 4 V$ $I_C = 8 A$ $V_{CE} = 4 V$	1000 100		12000	

* Pulsed: Pulse duration = 300 μs , duty cycle $\leq 2\%$
For PNP type voltage and current values are negative.


Safe Operating Area

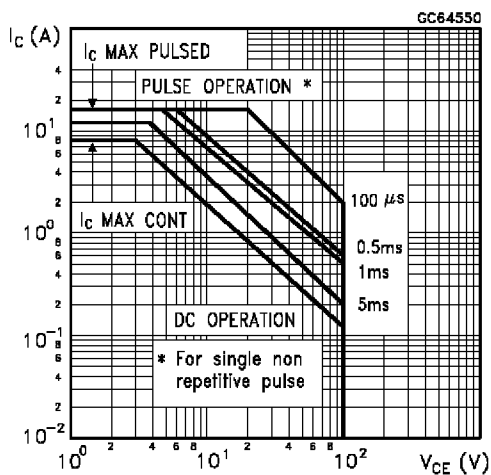


Derating Curve

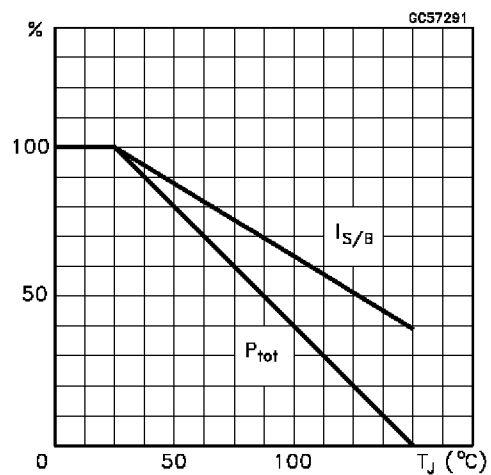


DC Current Gain (NPN type)

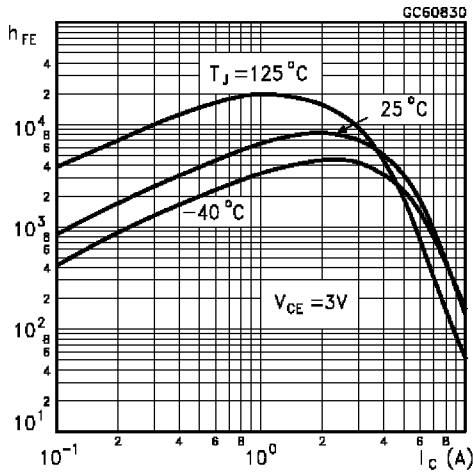


DC Current Gain (PNP type)

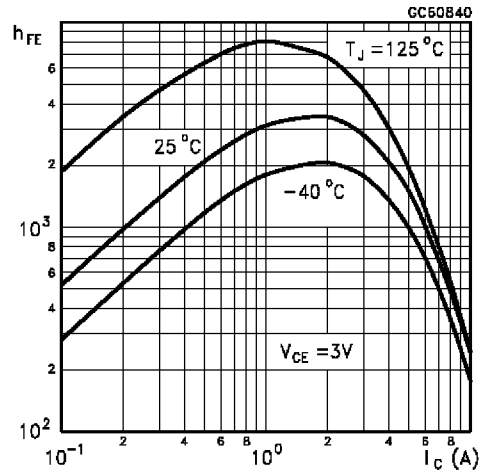


Collector Emitter Saturation Voltage (NPN type)

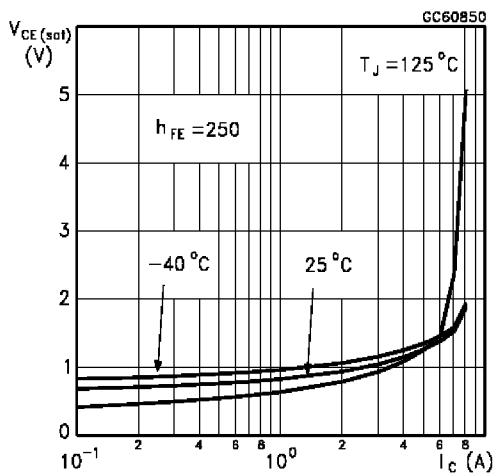


Collector Emitter Saturation Voltage (PNP type)

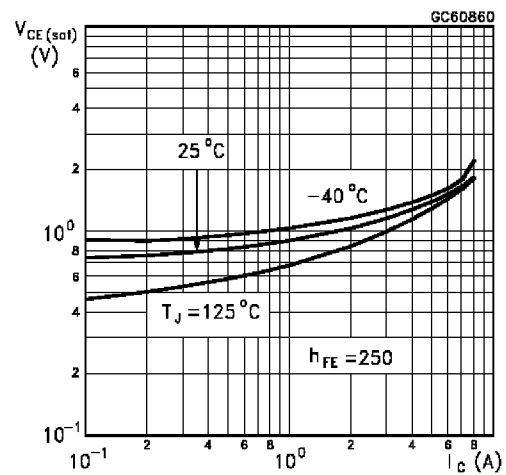


Base Emitter Saturation Voltage (NPN type)

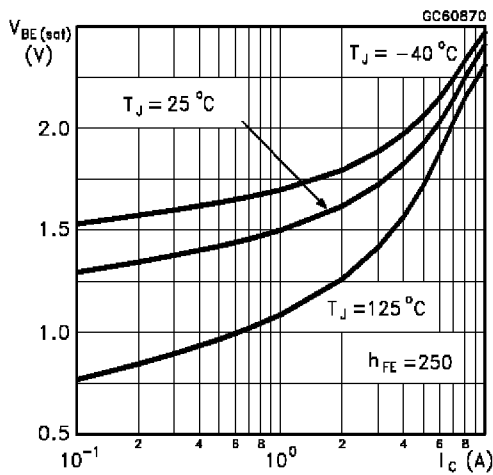


Base Emitter Saturation Voltage (PNP type)

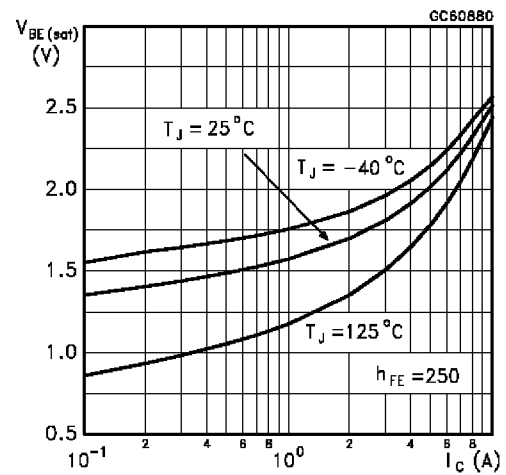


Base Emitter On Voltage (NPN type)

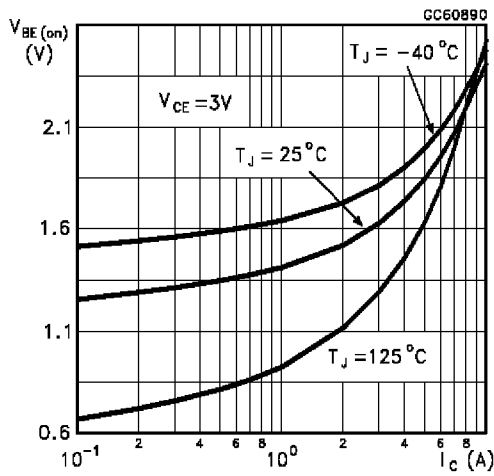


Base Emitter On Voltage (PNP type)

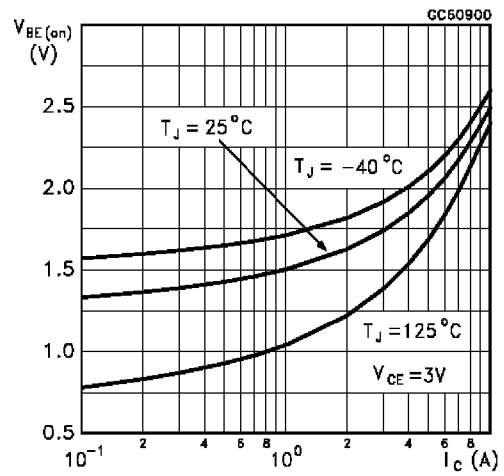


Freewheel Diode Forward Voltage (NPN type)

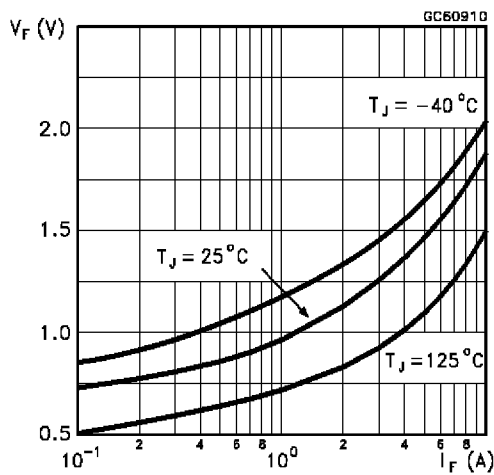


Freewheel Diode Forward Voltage (PNP type)

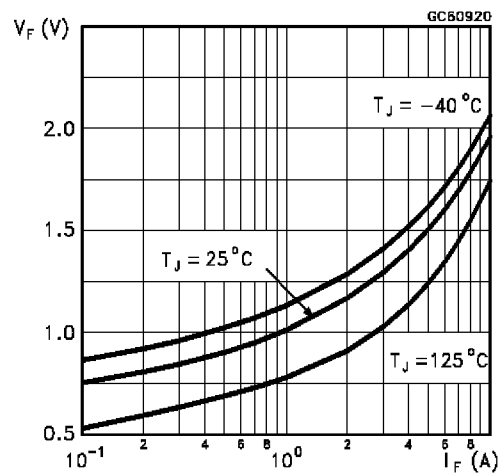

Switching Time Resistive Load (NPN type)

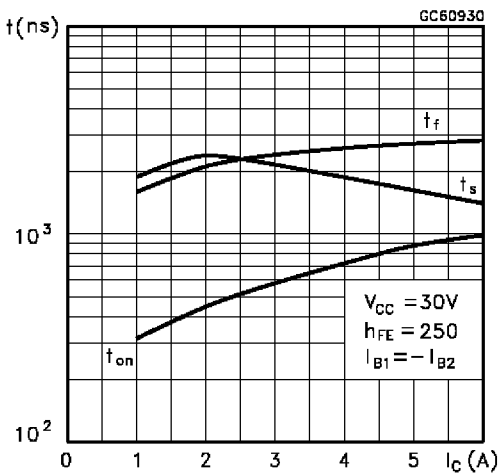

Switching Time resistive Load (PNP type)

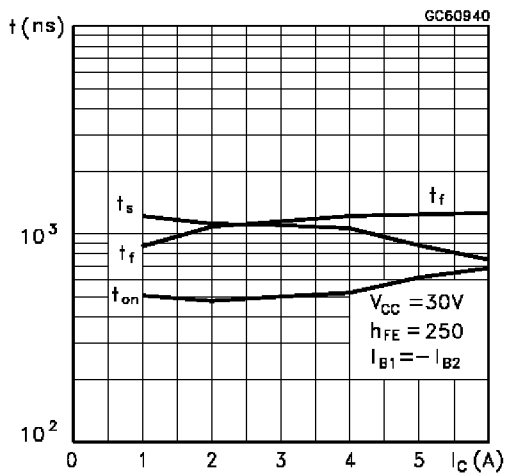

TO-252 (DPAK) MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	2.2		2.4	0.086		0.094
A1	0.9		1.1	0.035		0.043
A2	0.03		0.23	0.001		0.009
B	0.64		0.9	0.025		0.035
B2	5.2		5.4	0.204		0.212
C	0.45		0.6	0.017		0.023
C2	0.48		0.6	0.019		0.023
D	6		6.2	0.236		0.244
E	6.4		6.6	0.252		0.260
G	4.4		4.6	0.173		0.181
H	9.35		10.1	0.368		0.397
L2		0.8			0.031	
L4	0.6		1	0.023		0.039

