

Silicon NPN Power Transistor

2SC4388

DESCRIPTION



- Collector-Emitter Breakdown Voltage-
 $V_{(BR)CEO} = 180V(\text{Min})$
- Good Linearity of h_{FE}
- Complement to Type 2SA1673

APPLICATIONS

- Designed for audio and general purpose applications

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	200	V
V_{CEO}	Collector-Emitter Voltage	180	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current-Continuous	15	A
I_B	Base Current-Continuous	4	A
P_C	Collector Power Dissipation @ $T_c=25^\circ\text{C}$	85	W
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-55~150	$^\circ\text{C}$

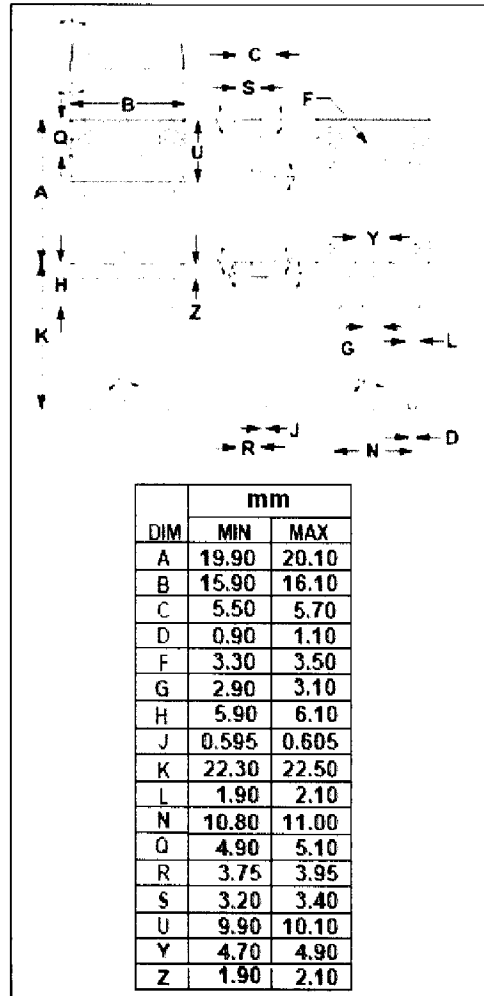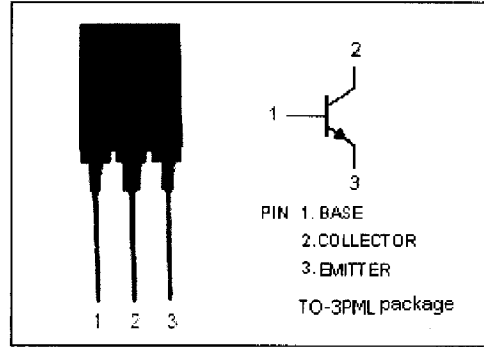

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.



Silicon NPN Power Transistor

2SC4388

ELECTRICAL CHARACTERISTICS

$T_C=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C=50\text{mA}; I_B=0$	180			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=5\text{A}; I_B=0.5\text{A}$			2.0	V
I_{CBO}	Collector Cutoff Current	$V_{CB}=200\text{V}; I_E=0$			10	μA
I_{EBO}	Emitter Cutoff Current	$V_{EB}=6\text{V}; I_C=0$			10	μA
h_{FE}	DC Current Gain	$I_C=3\text{A}; V_{CE}=4\text{V}$	50			
C_{OB}	Collector Output Capacitance	$I_E=0; V_{CB}=10\text{V}; f=1\text{MHz}$		300		pF
f_T	Current-Gain—Bandwidth Product	$I_E=-0.5\text{A}; V_{CE}=12\text{V}$		20		MHz

Switching times

t_{on}	Turn-on Time	$I_C=10\text{A}; R_L=4\Omega; V_{CC}=40\text{V}; I_{B1}=-I_{B2}=1\text{A}$			0.5	μs
t_{stg}	Storage Time				1.8	μs
t_f	Fall Time				0.6	μs

◆ h_{FE} Classifications

O	P	Y
50-100	70-140	90-180