

Glass Passivated Single-Phase Bridge Rectifiers

PRODUCT SUMMARY

Reverse Voltage 50 to 1000 Volts
Forward Current 4.0 Amperes




FEATURES

Ideal for printed circuit boards
High surge current capability
Typical I_R less than 0.1 μ A
High case dielectric strength
Solder Dip 260 °C, 40 seconds

MECHANICAL DATA

Case: GBL
Epoxy meets UL-94V-0 Flammability rating
Terminals: Matte tin plated (E3 Suffix) leads, solderable per J-STD-002B and JESD22-B102D
Polarity: As marked on body

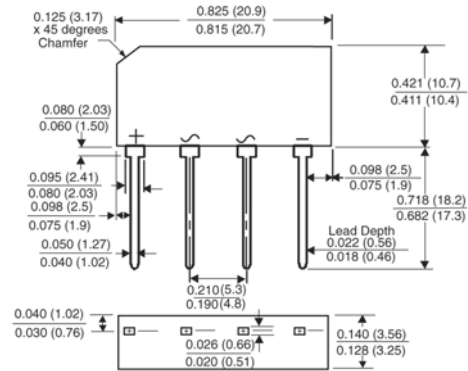


Polarity shown on front side of case, positive lead beveled corner

Package outline dimensions in inches (millimeters)

TYPICAL APPLICATIONS

General purpose use in ac-to-dc bridge full wave rectification for Monitor, TV, Printer, SMPS, Adapter, Audio equipment, and Home Appliances application



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Parameter	Symbols	GBL005	GBL01	GBL02	GBL04	GBL06	GBL08	GBL10	Units
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified output current at $T_C=50^\circ\text{C}$ $T_A=40^\circ\text{C}$	$I_{F(AV)}$				4.0 ⁽¹⁾				Amps
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}				150.0				Amps
Rating for fusing ($t < 8.3\text{ms}$)	Pt				93				A ² sec
Maximum instantaneous forward voltage drop per leg at 2.0A	V_F				1.0				Volts
Maximum DC reverse current at rated DC blocking voltage per leg $T_A=25^\circ\text{C}$ $T_A=150^\circ\text{C}$	I_R				10.0				μ A
Typical junction capacitance per leg at 4.0V, 1MHz	C_J	95			40				pF
Typical thermal resistance per leg	$R_{\theta JA}$ $R_{\theta JL}$				22 ⁽²⁾				°C/W
Operating junction and storage temperature range	T_J, T_{STG}				-55 to +150				°C

Notes: 1. Unit mounted on 3.0 x 3.0 x 0.11" thick (7.5 x 7.5 x 0.3 cm) Al. plate

2. Unit mounted on P.C.B. at 0.375" (9.5 mm) lead length and 0.5 x 0.5" (13 x 13 mm) copper pads

RATINGS AND CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

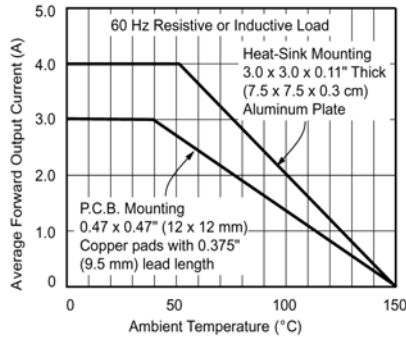


Figure 1. Derating Curves Output Rectified Current

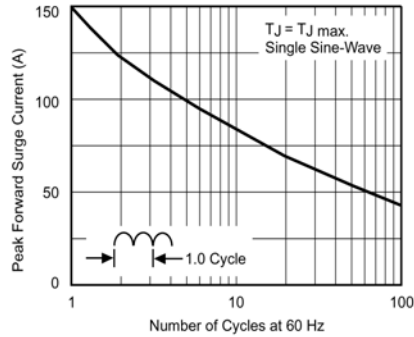


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Leg

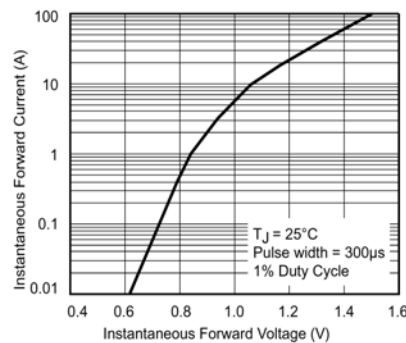


Figure 3. Typical Forward Voltage Characteristics Per Leg

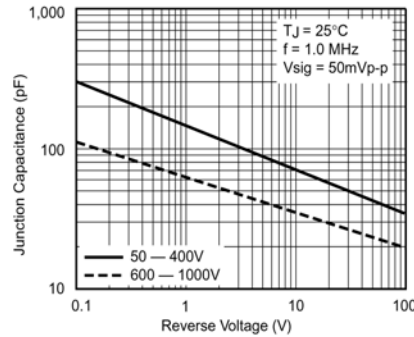


Figure 5. Typical Junction Capacitance Per Leg

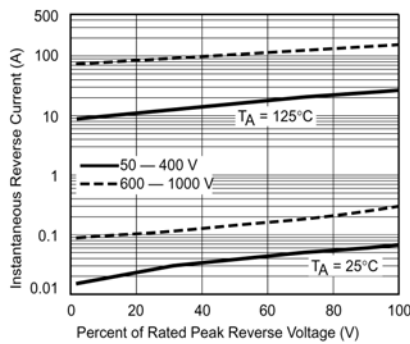


Figure 4. Typical Reverse Characteristics Per Leg

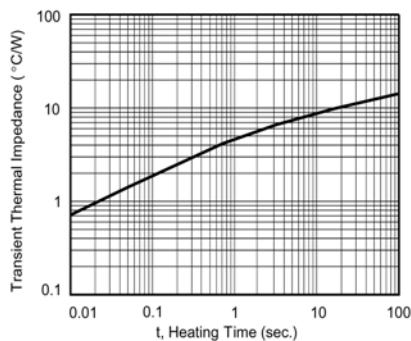


Figure 6. Typical Transient Thermal Impedance Per Leg

Information furnished by Silicon Standard Corporation is believed to be accurate and reliable. However, Silicon Standard Corporation makes no guarantee or warranty, expressed or implied, as to the reliability, accuracy, timeliness or completeness of such information and assumes no responsibility for its use, or for infringement of any patent or other intellectual property rights of third parties that may result from its use. Silicon Standard reserves the right to make changes as it deems necessary to any products described herein for any reason, including without limitation enhancement in reliability, functionality or design. No license is granted, whether expressly or by implication, in relation to the use of any products described herein or to the use of any information provided herein, under any patent or other intellectual property rights of Silicon Standard Corporation or any third parties.