


### SINGLE-PHASE BRIDGE RECTIFIER

#### FEATURES

- Low cost
- This series is UL recognized under component index, file number E127707
- High forward surge current capability
- Integally molded heatsink provide very low thermal resistance.
- High isolation voltage from case to leads.
- High temperature soldering guaranteed: 260°C/10 second, at 5 lbs. (2.3kg) tension.

#### MECHANICAL DATA

- Case: Molded plastic body, suffic "N" for thinner type
- Terminal: Plated lead 0.040" (1.02mm) diameter.
- Polarity: Polarity symbols marked on case.
- Mounting: Thru hole for #10 screw, 20 in,- lbs. Torqute Max.
- Weight: 0.61 ounce, 17.4 gram (BR15W)

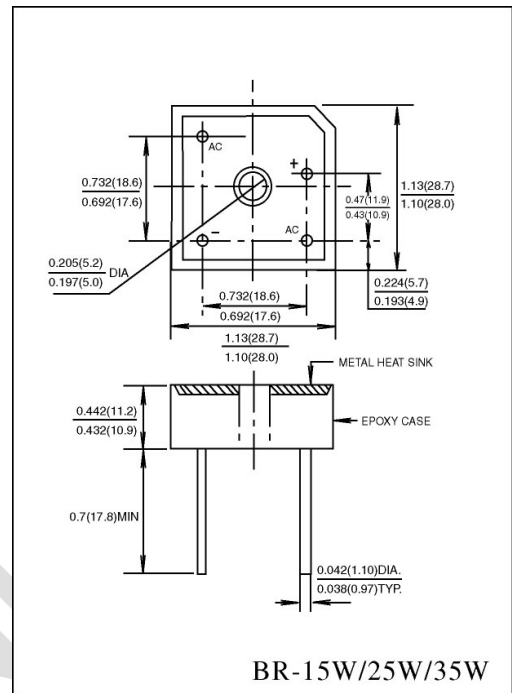

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single phase, half wave, 60Hz, resistive or inductive load.
- For capacitive load derate current by 20%

	SYMBOLS	BR1505W	BR151W	BR152W	BR154W	BR156W	BR158W	BR1510W	
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Output Current, at $T_C = 55^\circ C$ (Note 1, 2)	$I_{(AV)}$	15							Amps
Peak Forward Surge Current 8.3ms single half sine - wave superimposed on rated load (JEDEC method )	$I_{FSM}$	300							Amps
Rating for Fusing ( $t < 8.3ms$ )	$I^2t$	373							$A^2s$
Maximum Instantaneous Forward Voltage Drop per bridge element at 7.5A	$V_F$	1.1							Volts
Maximum DC Reverse Current at rate $T_A = 25^\circ C$	$I_R$	10							$\mu A$
DC blocking voltage per element $T_A = 100^\circ C$		1.0							mA
Isolation Voltage from case to leads	$V_{ISO}$	2500							$V_{AC}$
Typical Thermal Resistance (Note 1,2)	$R_{\theta JC}$	2.0							$^\circ C/W$
Operating Temperature Range	$T_J$	(-65 to +150)							$^\circ C$
Storage Temperature Range	$T_{STG}$	(-65 to +150)							$^\circ C$

1. Unit mounted on 5" X 4" X 3" (12.8cm X 10.2cm X 7.3cm)Al. finned Plate.

2. Bolt down on heat-sink with silicon thermal compound between bridge and mounting sutfae for maximum heat transfer efficiency with # 10 screw.

FIG.1-DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

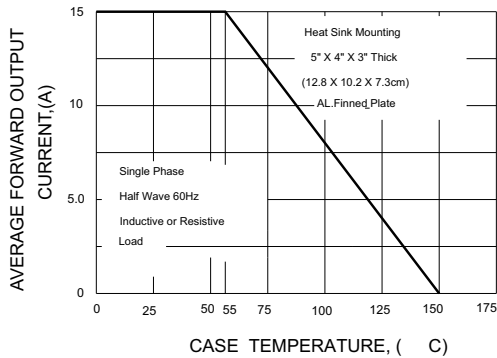


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER ELEMENT

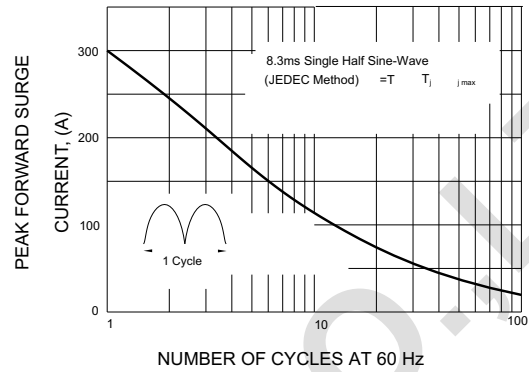


FIG.3-TYPICAL FORWARD CHARACTERISTICS PER BRIDGE ELEMENT

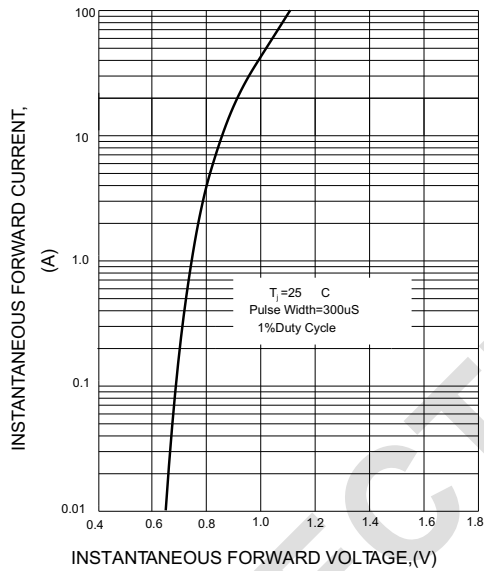


FIG.4-TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

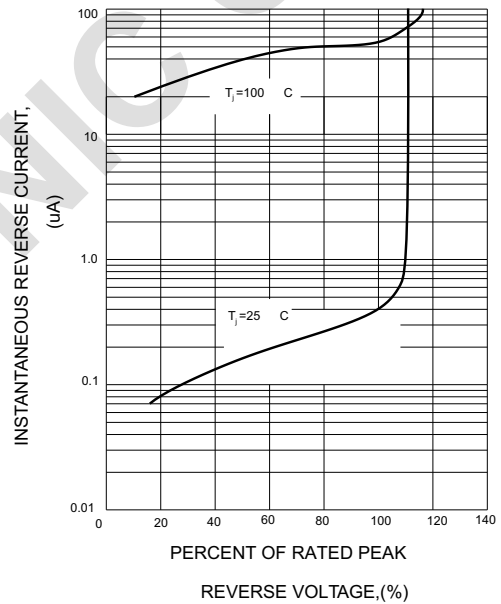


FIG.5-TYPICAL JUNCTION CAPACITANCE PER BRIDGE ELEMENT

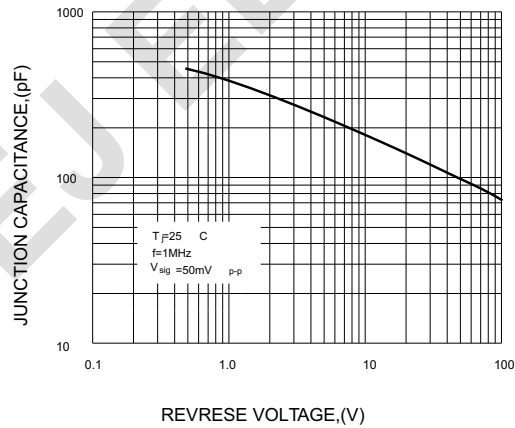


FIG.6-MAXIMUM POWER DISSIPATION

