


# KBPC35005W THRU KBPC3510W



SINGLE PHASE 35 AMP BRIDGE RECTIFIERS



## FEATURES


- \* Superior thermal design
- \* 400 amperes surge capability
- \* Mounting: Hole thru for #8 screw
- \* Weight: 24.40 grams
- \* Both normal and Pb free product are available:
- \* Normal: 80-95% Sn, 5-20% Pb
- \* Pb free: 99 Sn above can meet RoHS environment substance directive request

## VOLTAGE RANGE

50 to 1000 Volts

## CURRENT

35.0 Ampere

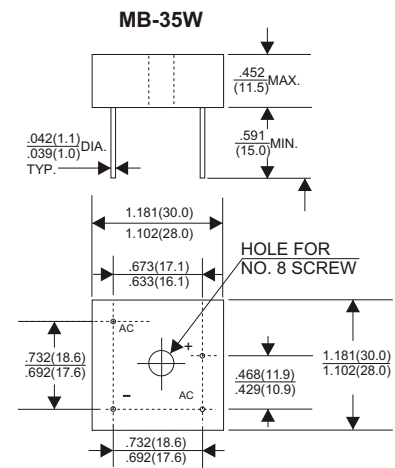

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.  
Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

TYPE NUMBER	KBPC35005W	KBPC3501W	KBPC3502W	KBPC3504W	KBPC3506W	KBPC3508W	KBPC3510W	UNITS	
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	35	70	140	280	420	560	700	V	
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V	
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length at Tc=55°C								35	A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)								400	A
Maximum Forward Voltage Drop per Bridge Element at 17.5A D.C.								1.1	V
Maximum DC Reverse Current Ta=25°C								10	uA
at Rated DC Blocking Voltage Ta=100°C								500	uA
Operating Temperature Range, Tj								-65 — +125	°C
Storage Temperature Range, TSTG								-65 — +150	°C

## RATING AND CHARACTERISTIC CURVES (KBPC35005W THRU KBPC3510W)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

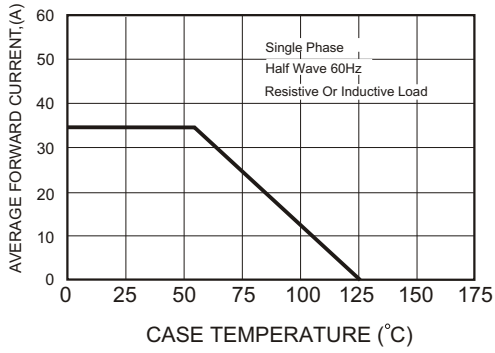


FIG.2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

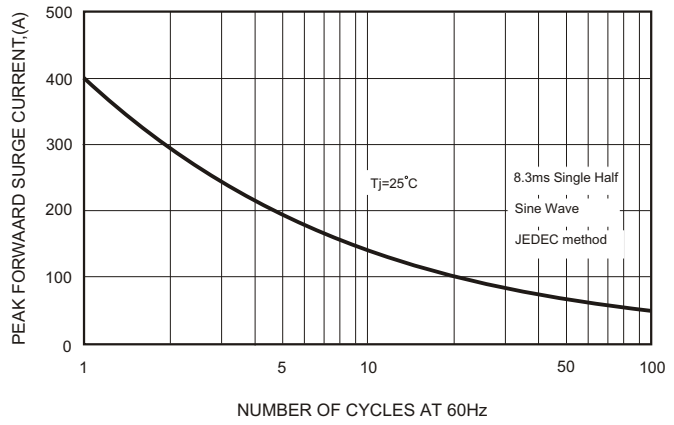


FIG.3-TYPICAL FORWARD CHARACTERISTICS

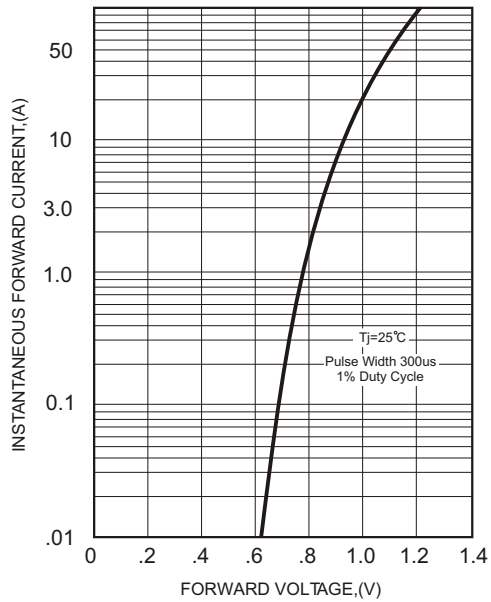


FIG.4-TYPICAL REVERSE CHARACTERISTICS

