



DB201 THRU DB207

Voltage Range - 50 to 1000 Volts Current - 1.0 Ampere


SINGLE PHASE GLASS PASSIVATED BRIDGE RECTIFIERS

Features

- ◆ Ideal for printed circuit board
- ◆ Reliable low cost construction utilizing molded plastic technique
- ◆ High temperature soldering guaranteed: 260°/10 seconds at 5 lbs., (2.3kg) tension
- ◆ Small size, simple installation
- ◆ High surge current capability

DB

ROHS
COMPLIANT

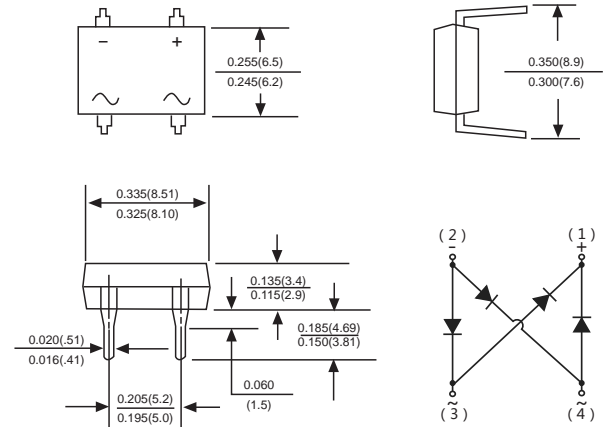

Dimensions in inches and (millimeters)

Mechanical Data

Case : JEDEC DB Molded plastic body
Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
Polarity : Polarity symbol marking on case
Mounting Position : Any
Weight : 0.02 ounce, 0.4 grams

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	MDD	MDD	MDD	MDD	MDD	MDD	MDD	UNITS
		DB201	DB202	DB203	DB204	DB205	DB206	DB207	
Marking Code									
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current at $T_C=40^\circ C$	$I_{F(AV)}$	2.0							A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	60							A
Maximum instantaneous forward voltage drop per leg at 1A	V_F	1.1							V
Maximum DC reverse current at rated DC blocking voltage	I_R	10 500							μA μA
Operating temperature range	T_J	- 5 5 t o + 1 5 0							$^\circ C$
storage temperature range	T_{STG}	-55 to +150							$^\circ C$

Note: 1. Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts.

2. Unit mounted on P.C. board with 0.51" x 0.51" (13x13mm) copper pads.



DB201 THRU DB207

Voltage Range - 50 to 1000 Volts Current - 1.0 Ampere

Ratings And Characteristic Curves

FIG. 1- MAXIMUM DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

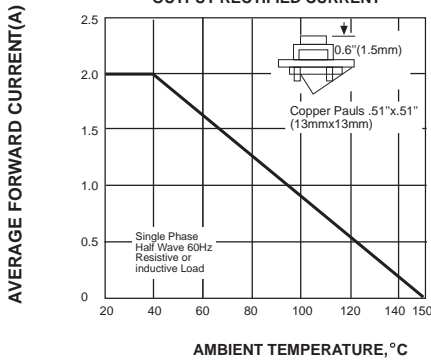


FIG. 2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

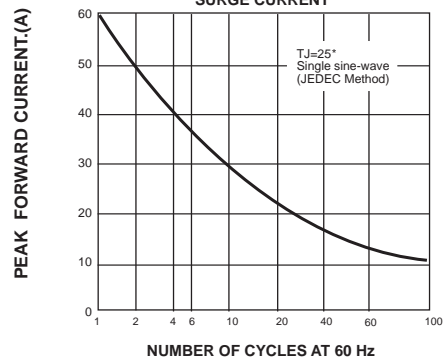


FIG. 3- TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

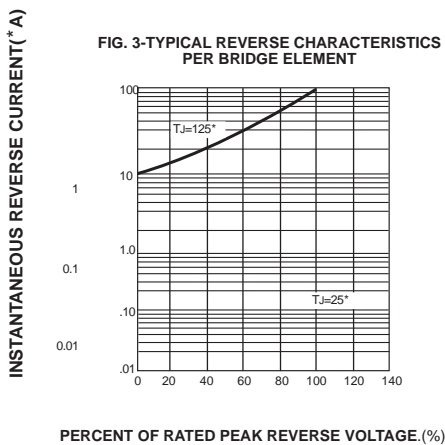


FIG. 4- TYPICAL FORWARD CHARACTERISTICS PER BRIDGE ELEMENT


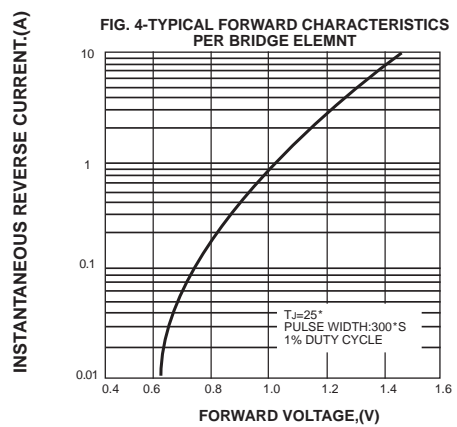


FIG. 3- TYPICAL JUNCTION CAPACITANCE PER BRIDGE ELEMENT

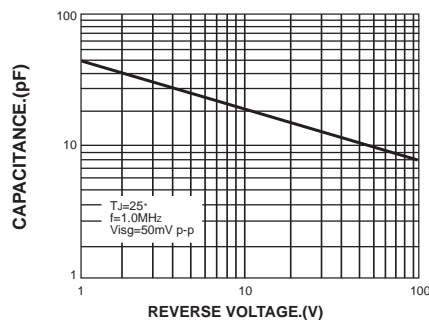

The curve above is for reference only.