

BAS40W / BAS40W-04 / BAS40W-05 / BAS40W-06

List

List..... 1

Package outline..... 2

Features..... 2

Mechanical data..... 2

Maximum ratings and Electrical characteristics2

Rating and characteristic curves..... 3

Pinning information.....4

Marking..... 4

Suggested solder pad layout..... 4

Packing information..... 5

Reel packing..... 6

Suggested thermal profiles for soldering processes..... 6


High reliability test capabilities.....7

BAS40W / BAS40W-04 / BAS40W-05 / BAS40W-06**200mA Surface Mount Small Signal Schottky Diodes 40V****Features**

- Low current rectification and high speed switching
- Tiny surface mount type
- Up to 200mA current capability
- Low forward voltage drop ($V_F \text{ max}=1.00\text{V}@I_F=40\text{mA}$)
- Silicon epitaxial planar chip, metal silicon junction
- High speed ($t_{rr} < 5\text{ns}$)
- Lead-free parts meet RoHS requirements
- Suffix "-H" indicates Halogen-free part, ex. BAS40W-H

Mechanical data

- Epoxy: UL94-V0 rated flame retardant
- Case : Molded plastic, SOT-323
- Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
- Mounting Position : Any
- Weight : Approximated 0.006 gram

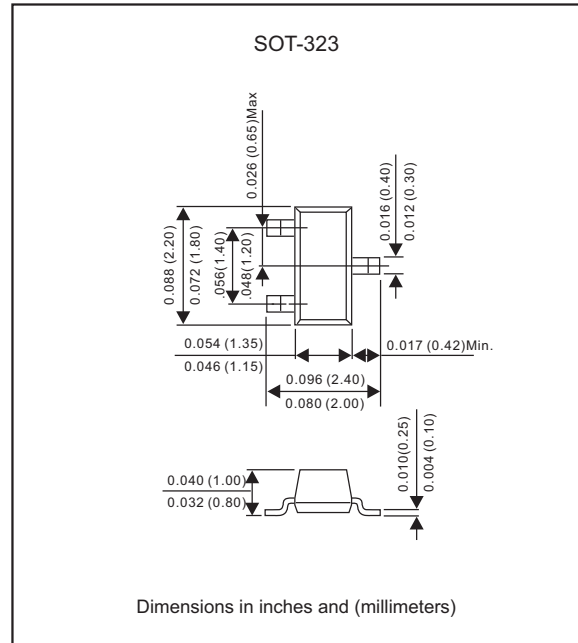Package outline**Maximum ratings** (AT $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Conditions	Symbol	MIN.	TYP.	MAX.	Unit
Repetitive peak reverse voltage		V_{RRM}			40	V
Reverse voltage		V_R			40	V
Power dissipation		P_D			200	mW
Non-repetitive forward current	$t_p < 1\text{s}$	I_{FSM}			600	mA
Forward current		I_F			200	mA
Operating junction temperature range		T_J	-55		+125	$^\circ\text{C}$
Storage temperature range		T_{STG}	-55		+125	$^\circ\text{C}$

Electrical characteristics (AT $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Conditions	Symbol	MIN.	TYP.	MAX.	Unit
Forward voltage	$I_F=1\text{mA}$	V_F			0.38	V
	$I_F=40\text{mA}$	V_F			1.00	V
Reverse current	$V_R=30\text{V}$	I_R			0.2	μA
Diode capacitance	$V_R=0\text{V}$, $f=1\text{MHz}$	C_T			5.0	pF
Reverse recovery time	$I_F=10\text{mA}$, $V_R=10\text{mA}$, $I_{RR}=0.1 \times I_R$, $R_L=100\Omega$	t_{rr}			5	ns

Rating and characteristic curves for each diode (BAS40W / BAS40W-04 / BAS40W-05 / BAS40W-06)

FIG.1-TYPICAL FORWARD VOLTAGE

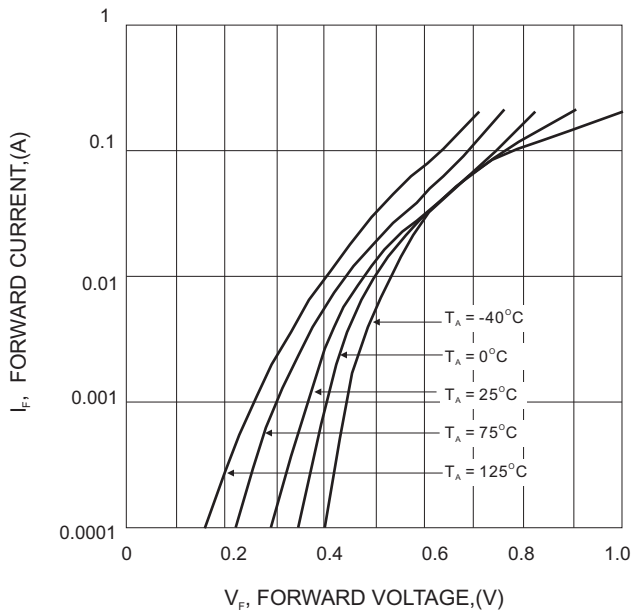


FIG.2-TYPICAL REVERSE CHARACTERISTICS

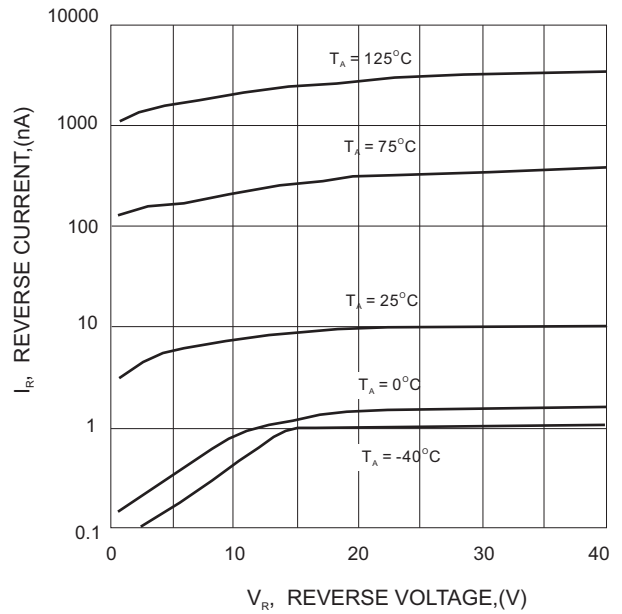


FIG.3-TYPICAL CAPACITANCE










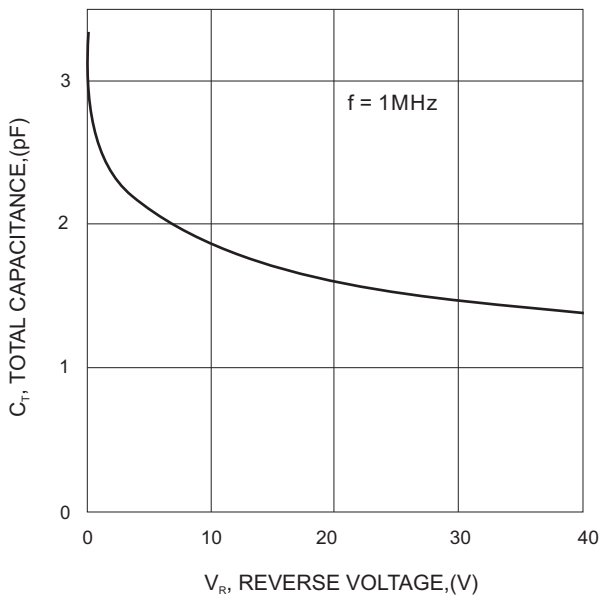


FIG.4-POWER DERATING CURVE

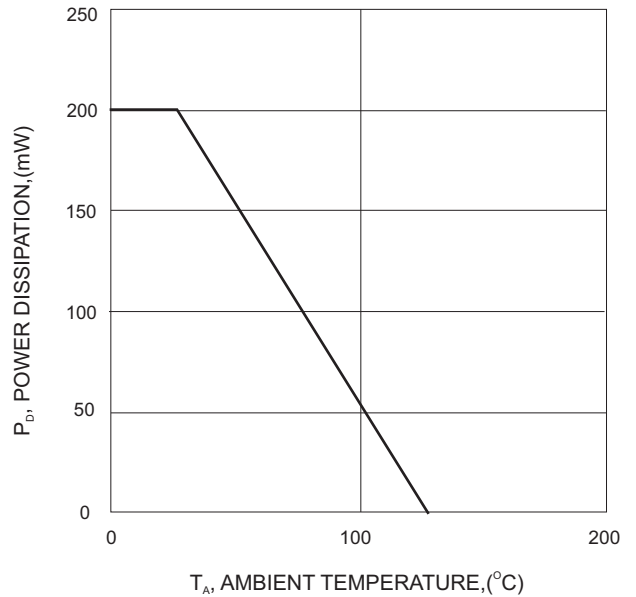


BAS40W / BAS40W-04 / BAS40W-05 / BAS40W-06

Pinning information

Type number	Marking code	Simplified outline	Symbol
BAS40W	43		
BAS40W-04	44		
BAS40W-05	45		
BAS40W-06	46		

Suggested solder pad layout


SOT-323

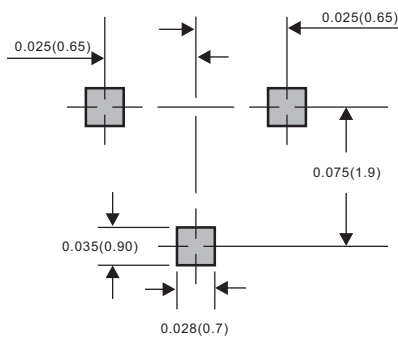

Dimensions in inches and (millimeters)

BAS40W / BAS40W-04 / BAS40W-05 / BAS40W-06

Packing information

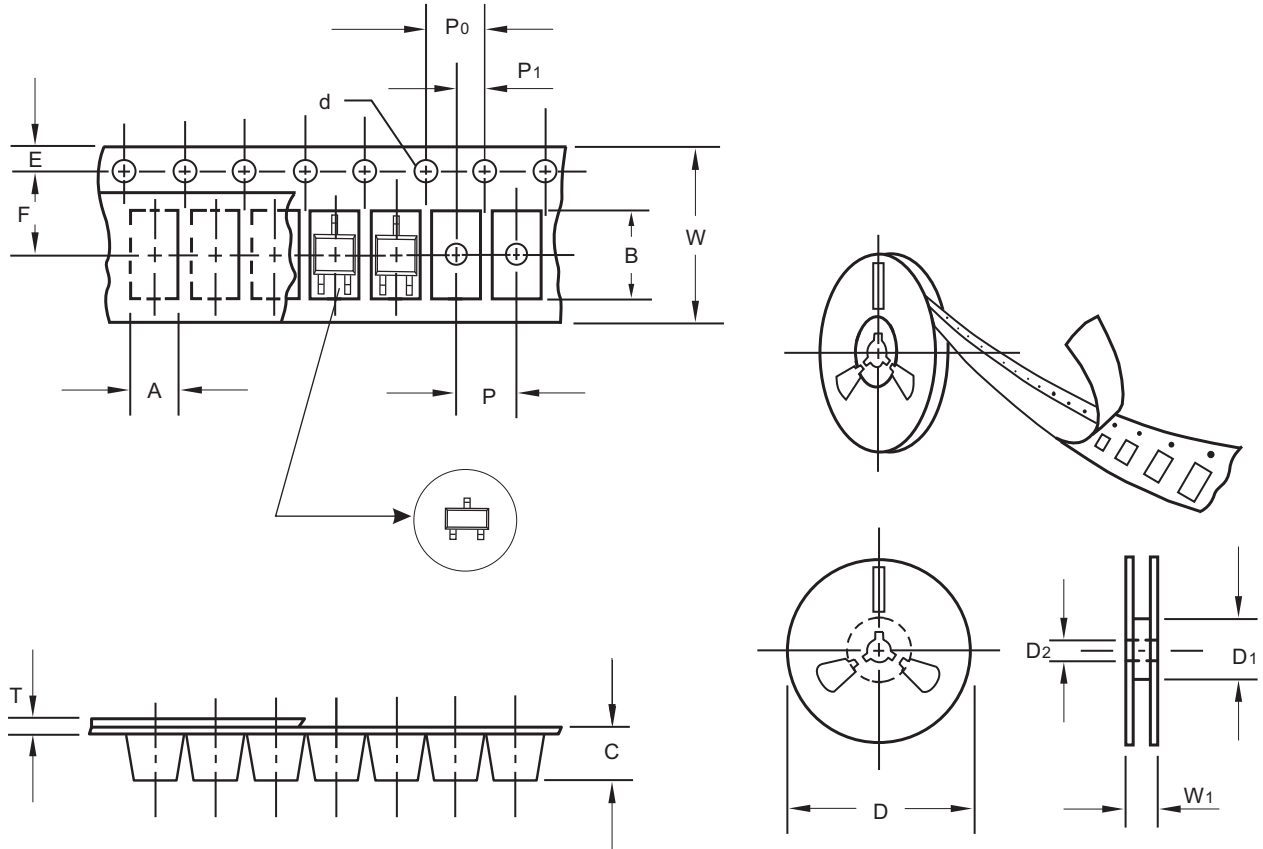

unit:mm

Item	Symbol	Tolerance	SOT-323
Carrier width	A	0.1	2.36
Carrier length	B	0.1	2.40
Carrier depth	C	0.1	1.20
Sprocket hole	d	0.1	1.50
13" Reel outside diameter	D	2.0	-
13" Reel inner diameter	D1	min	-
7" Reel outside diameter	D	2.0	178.00
7" Reel inner diameter	D1	min	62.00
Feed hole diameter	D2	0.5	13.00
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	3.50
Punch hole pitch	P	0.1	4.00
Sprocket hole pitch	P0	0.1	4.00
Embossment center	P1	0.1	2.00
Overall tape thickness	T	0.1	0.23
Tape width	W	0.3	8.00
Reel width	W1	1.0	11.40

Note: Devices are packed in accordance with EIA standard RS-481-A and specifications listed above.


BAS40W / BAS40W-04 / BAS40W-05 / BAS40W-06

Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (m/m)	BOX (pcs)	INNER BOX (m/m)	REEL DIA, (m/m)	CARTON SIZE (m/m)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
SOT-323	7"	3,000	4.0	30,000	183*123*183	178	382*257*387	240,000	9.5

Suggested thermal profiles for soldering processes

- 1.Storage environment: Temperature=5°C~40°C Humidity=55%±25%
- 2.Reflow soldering of surface-mount devices

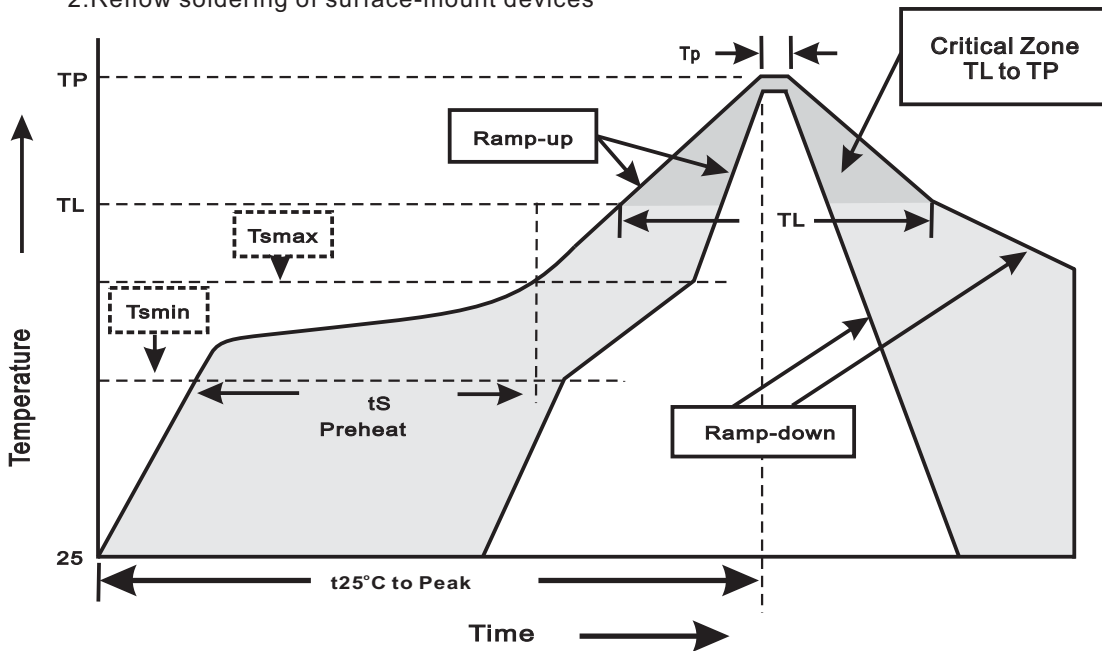

3.Reflow soldering

Profile Feature	Soldering Condition
Average ramp-up rate(T _L to T _P)	<3°C/sec
Preheat -Temperature Min(T _{smín}) -Temperature Max(T _{smáx}) -Time(min to max)(t _s)	150°C 200°C 60~120sec
T _{smáx} to T _L -Ramp-upRate	<3°C/sec
Time maintained above: -Temperature(T _L) -Time(t _L)	217°C 60~260sec
Peak Temperature(T _P)	255°C-0/+5°C
Time within 5°C of actual Peak Temperature(t _P)	10~30sec
Ramp-down Rate	<6°C/sec
Time 25°C to Peak Temperature	<6minutes

BAS40W / BAS40W-04 / BAS40W-05 / BAS40W-06**High reliability test capabilities**

Item Test	Conditions	Reference
1. Solder Resistance	at 260±5°C for 10±2sec.	MIL-STD-750D METHOD-2031
2. Solderability	at 245±5°C for 5 sec.	MIL-STD-202F METHOD-208
3. High Temperature Reverse Bias	$V_R=80\%$ rate at $T_J=125^\circ\text{C}$ for 168 hrs.	MIL-STD-750D METHOD-1038
4. Forward Operation Life	Rated average rectifier current at $T_A=25^\circ\text{C}$ for 500hrs.	MIL-STD-750D METHOD-1027
5. Intermittent Operation Life	$T_A = 25^\circ\text{C}$, $I_F = I_O$ On state: power on for 5 min. off state: power off for 5 min. on and off for 500 cycles.	MIL-STD-750D METHOD-1036
6. Pressure Cooker	15P _{SIG} at $T_A=121^\circ\text{C}$ for 4 hrs.	JESD22-A102
7. Temperature Cycling	-55°C to +125°C dwelled for 30 min. and transferred for 5min. total 10 cycles.	MIL-STD-750D METHOD-1051
8. Forward Surge	Forward surge current $t_p < 1\text{s}$	MIL-STD-750D METHOD-4066-2
9. Humidity	at $T_A=85^\circ\text{C}$, RH=85% for 1000hrs.	MIL-STD-750D METHOD-1021
10. High Temperature Storage Life	at 175°C for 1000 hrs.	MIL-STD-750D METHOD-1031