

# SS32B-AT THRU SS320B-AT

## Surface Mount Schottky Barrier Rectifier

Reverse Voltage - 20 to 200 V      Forward Current - 3A

### FEATURES

- ◆ Metal silicon junction, majority carrier conduction
- ◆ For surface mounted applications
- ◆ Low power loss, high efficiency
- ◆ High forward surge current capability
- ◆ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

### PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode



Top View  
Marking Code: SS32-AT ~ SS320-AT  
Simplified outline SMB and symbol

### MECHANICAL DATA

- ◆ Case: SMB
- ◆ Terminals: Solderable per MIL-STD-750, Method 2026
- ◆ Approx. Weight: 95mg ( 0.0034oz )

### Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	SS32B-AT	SS34B-AT	SS36B-AT	SS38B-AT	SS310B-AT	SS312B-AT	SS315B-AT	SS320B-AT	Units
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	20	40	60	80	100	120	150	200	V
Maximum RMS voltage	$V_{RMS}$	14	28	42	56	70	84	105	140	V
Maximum DC Blocking Voltage	$V_{DC}$	20	40	60	80	100	120	150	200	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	3.0								A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	80								A
Max Instantaneous Forward Voltage at 3A	$V_F$	0.55	0.70		0.85		0.95		V	
Maximum DC Reverse Current $T_a = 25^\circ\text{C}$ at Rated DC Reverse Voltage $T_a = 100^\circ\text{C}$	$I_R$	0.5 5			0.3 3				mA	
Typical Junction Capacitance <sup>(1)</sup>	$C_j$	450			400				pF	
Typical Thermal Resistance <sup>(2)</sup>	$R_{\theta JA}$	60								°C/W
Operating Junction Temperature Range	$T_j$	-55 ~ +150								°C
Storage Temperature Range	$T_{stg}$	-55 ~ +150								°C

( 1 ) Measured at 1 MHz and applied reverse voltage of 4 VD.C

( 2 ) B mounted with 2.0" X 2.0" ( 5 X 5 cm) copper pad areas.

# SS32B-AT THRU SS320B-AT

## Typical Characteristics Curves

Fig.1 Forward Current Derating Curve

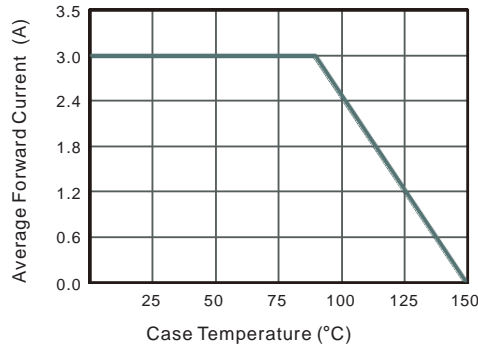


Fig.2 Typical Reverse Characteristics

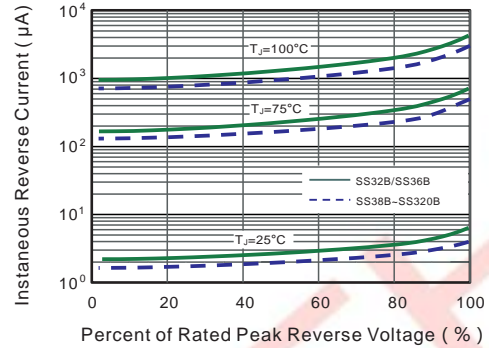


Fig.3 Typical Forward Characteristic

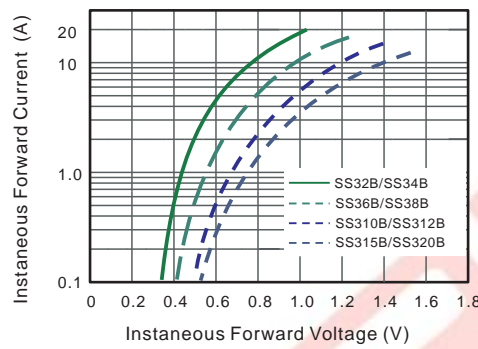


Fig.4 Typical Junction Capacitance

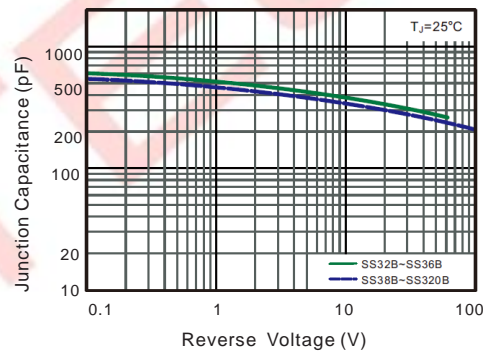


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


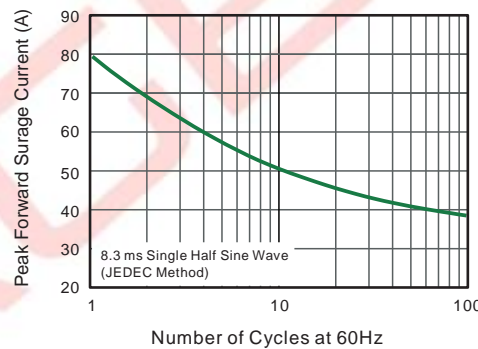



Fig.6- Typical Transient Thermal Impedance

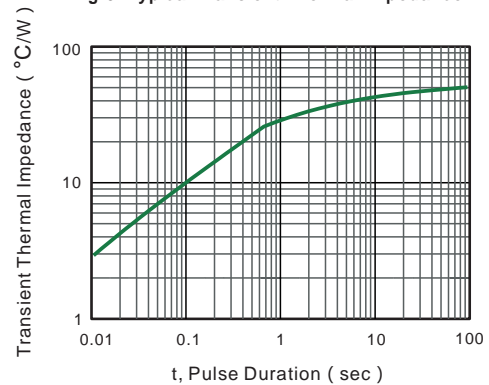


# SS32B-AT THRU SS320B-AT

## Package Outline

### SMB

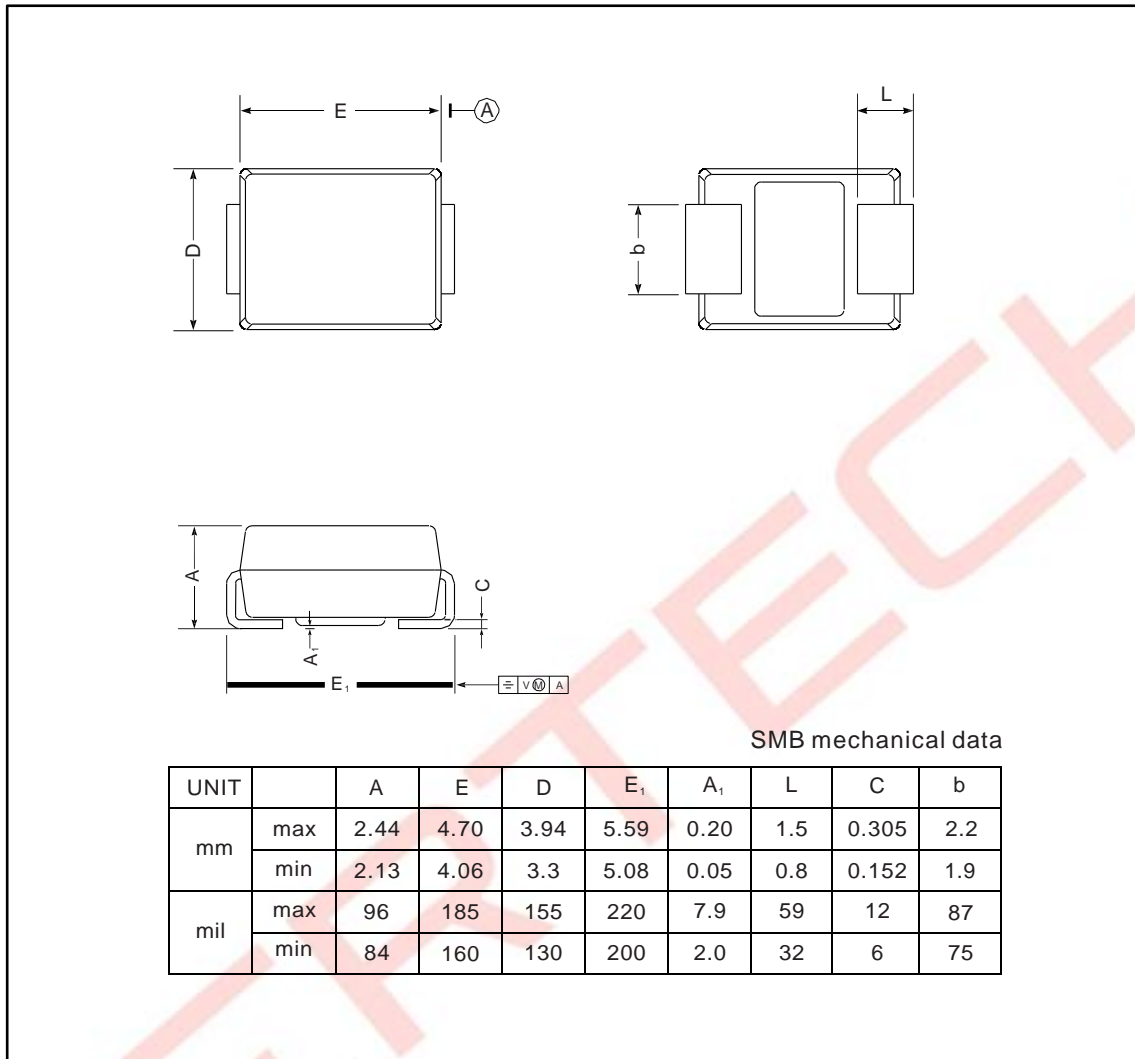

### The recommended mounting pad size

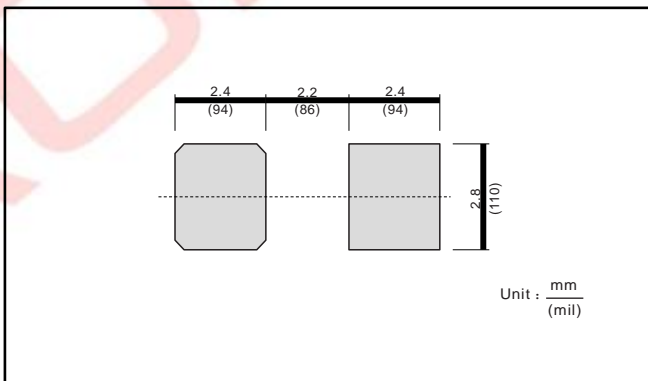

### Marking

Type number	Marking code
SS32B-AT	SS32-AT
SS34B-AT	SS34-AT
SS36B-AT	SS36-AT
SS38B-AT	SS38-AT
SS310B-AT	SS310-AT
SS312B-AT	SS312-AT
SS315B-AT	SS315-AT
SS320B-AT	SS320-AT