


# SACC-V-3CON-PG9/A-1L-SV 24V - Valve connectors



1527919

<https://www.phoenixcontact.com/us/products/1527919>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Valve connectors, Universal, 3-position, Valve connector A, Screw connection, cable gland Pg9, external cable diameter 6 mm ... 8 mm

## Commercial Data

Item number	1527919
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	BF36
Product Key	BF2DAA
Catalog Page	Page 110 (PC-2009)
GTIN	4017918980993
Weight per Piece (including packing)	24.72 g
Weight per Piece (excluding packing)	24.7 g
Customs tariff number	85366990
Country of origin	HU

## Technical Data

### Notes

General	<b>NOTE:</b> Observe the permissible bending radii when laying conductors, since the degree of protection may be put in jeopardy if the bending forces are too high. Alleviate mechanical loads upstream of the connector, e.g. by using cable ties.
---------	--

### Product properties

Product type	Valve connectors
Sensor type	Universal
Number of positions	3
No. of cable outlets	1
Shielded	no
Pg screw connection	Pg9

### Insulation characteristics

Overvoltage category	II
Degree of pollution	3

### Electrical properties

Contact resistance	≤ 15 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage $U_N$	24 V AC
	24 V DC
Nominal current $I_N$	10 A
Protective circuit	Surge protection; Varistor

### Connection data

Connection method	Screw connection
Conductor cross section	0.34 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Connection cross section AWG	22 ... 16
Stripping length of the individual wire	6 mm
Tightening torque	0.8 Nm ... 1 Nm (Pressure nut)
	0.4 Nm (Central screw)
	0.5 Nm (Contact screw)

### Interfaces

Signal type/category	Universal
----------------------	-----------

### Signaling

Status display	1 LED
Status display present	Yes

### Dimensions

# SACC-V-3CON-PG9/A-1L-SV 24V - Valve connectors



1527919

<https://www.phoenixcontact.com/us/products/1527919>

## External dimensions

Outside diameter	6 mm ... 8 mm
------------------	---------------

## Material specifications

Color Handle area	transparent
Flammability rating according to UL 94	HB
Seal material	NBR
Material housing valve plug	PA 6
Contact material	CuSn
Valve plug contact insert material	PA 6
Contact surface material	Ni

## Connector

### Connection 1

Head design	Valve connector
Head thread type	A

## Cable/line

Signal type/category	Universal
Stripping length of the individual wire	6 mm

## Mechanical properties

### Mechanical data

Insertion/withdrawal cycles	50 (Valve connector)
-----------------------------	----------------------

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP65
Ambient temperature (operation)	-25 °C ... 85 °C (valve plug)

## Mounting


Connection method	Screw connection
-------------------	------------------

1527919


<https://www.phoenixcontact.com/us/products/1527919>

## Drawings

Dimensional drawing

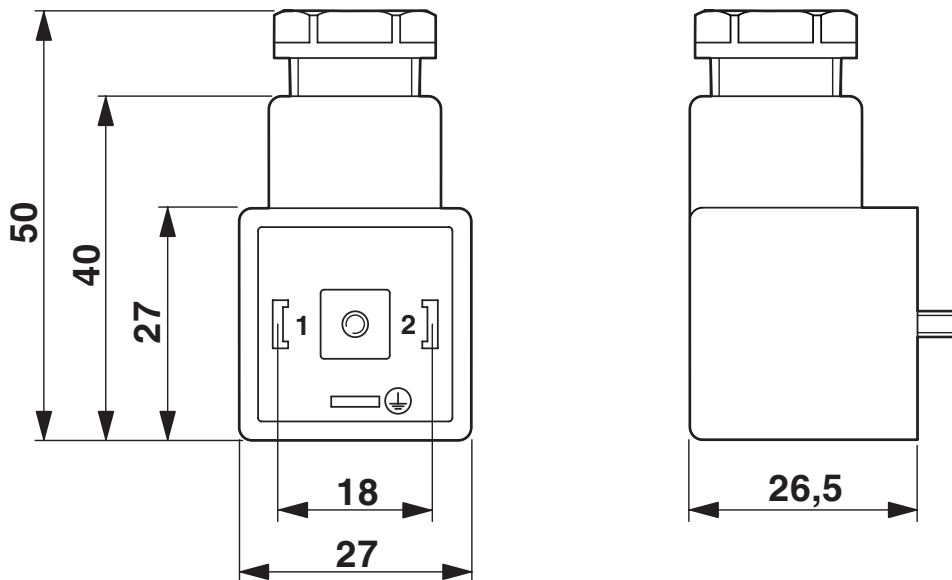

Schematic diagram

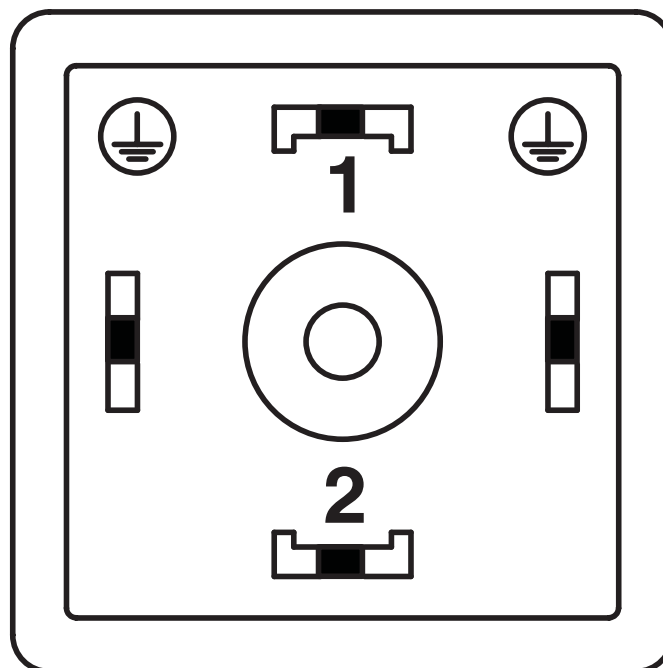

Valve connector pin assignment, type A


# SACC-V-3CON-PG9/A-1L-SV 24V - Valve connectors



1527919

<https://www.phoenixcontact.com/us/products/1527919>

Circuit diagram

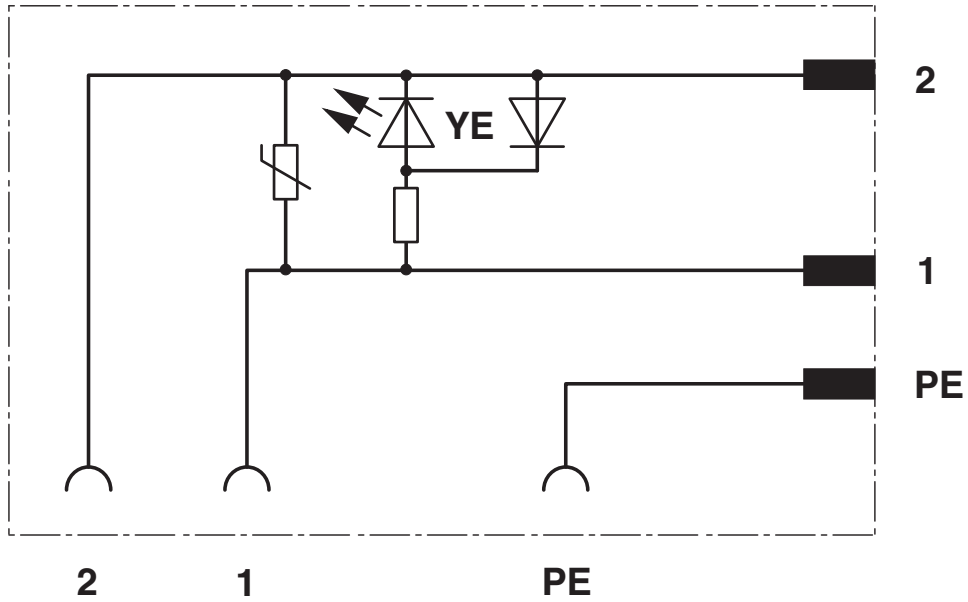

# SACC-V-3CON-PG9/A-1L-SV 24V - Valve connectors



1527919

<https://www.phoenixcontact.com/us/products/1527919>

## Classifications

### ECLASS

ECLASS-11.0	27440105
ECLASS-12.0	27440105
ECLASS-13.0	27440105

### ETIM

ETIM 8.0	EC003623
----------	----------

### UNSPSC

UNSPSC 21.0	31251500
-------------	----------

# SACC-V-3CON-PG9/A-1L-SV 24V - Valve connectors



1527919

<https://www.phoenixcontact.com/us/products/1527919>

## Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)